



PROJECT DESCRIPTION

Proposed 20 unit Multi-Family project. Total of 6 Buildings, 2 and 3 story, with roof decks. All resident parking provided in attached private garages. Additional surface parking for accessible spaces and guests. Two building/unit types are proposed:

Buildings A, B, and C are 3 level 2 story. Floor 1 (Garage Level) is partially below grade. All units are 3 bedroom 4 1/2 bath.

Building D, E, and F are 3 level 3 story. Floor 1 includes a bedroom suite with private terrace in addition to the Garage. All units are 3 bedroom 3 1/2 Bath.

PROJECT DATA

BUILDING	
Occupancy	R-2
Construction Type	Type V Sprinklered Gateway
Zoning	6
Total Buildings	20
Total Units	60
Total Bedrooms	60
Total Area	60998 (residential)
SITE	
Total Site Area	95614 sf
Landscaping	48734 sf
Paving	20041 sf
Terrace / Patios	1970 sf
Building Coverage	24869 sf
Lot Coverage	46880 sf 48.8% (60% max allow)
Snow Storage	5801 sf 28.9% (28.6% req)
Steep Slope Area	20084 sf
Steep Slope Bldg Cover	7195 sf

PARKING	
Private Garage	60
Guest	4
Accessible Van	3
Total Parking	67

BUILDING AREA

Bldg A, B, C
Condo Plan 1
3 Bedroom 4 1/2 Bath

Living Area (single unit)	
Floor 1	298 sf
Floor 2	1063 sf
Floor 3	950 sf
Roof	168 sf
Total Living	2479 sf
Garage	781 sf
Total Unit	3260 sf
Total Bldg	9780 sf


Bldg D, E
Condo Plan 2
3 Bedroom 3 1/2 Bath

Living Area (single unit)	
Floor 1	490 sf
Floor 2	874 sf
Floor 3	727 sf
Roof	70 sf
Total Living	2161 sf
Garage	717 sf
Total Unit	2878 sf
Total Bldg	11512 sf

Bldg F
Condo Plan 2
3 Bedroom 3 1/2 Bath

Living Area (single unit)	
Floor 1	490 sf
Floor 2	874 sf
Floor 3	727 sf
Roof	70 sf
Total Living	2161 sf
Garage	717 sf
Total Unit	2878 sf
Total Bldg	8634 sf


Total Residential (6 Bldgs)	60998 sf
Refuse Enclosure	264 sf

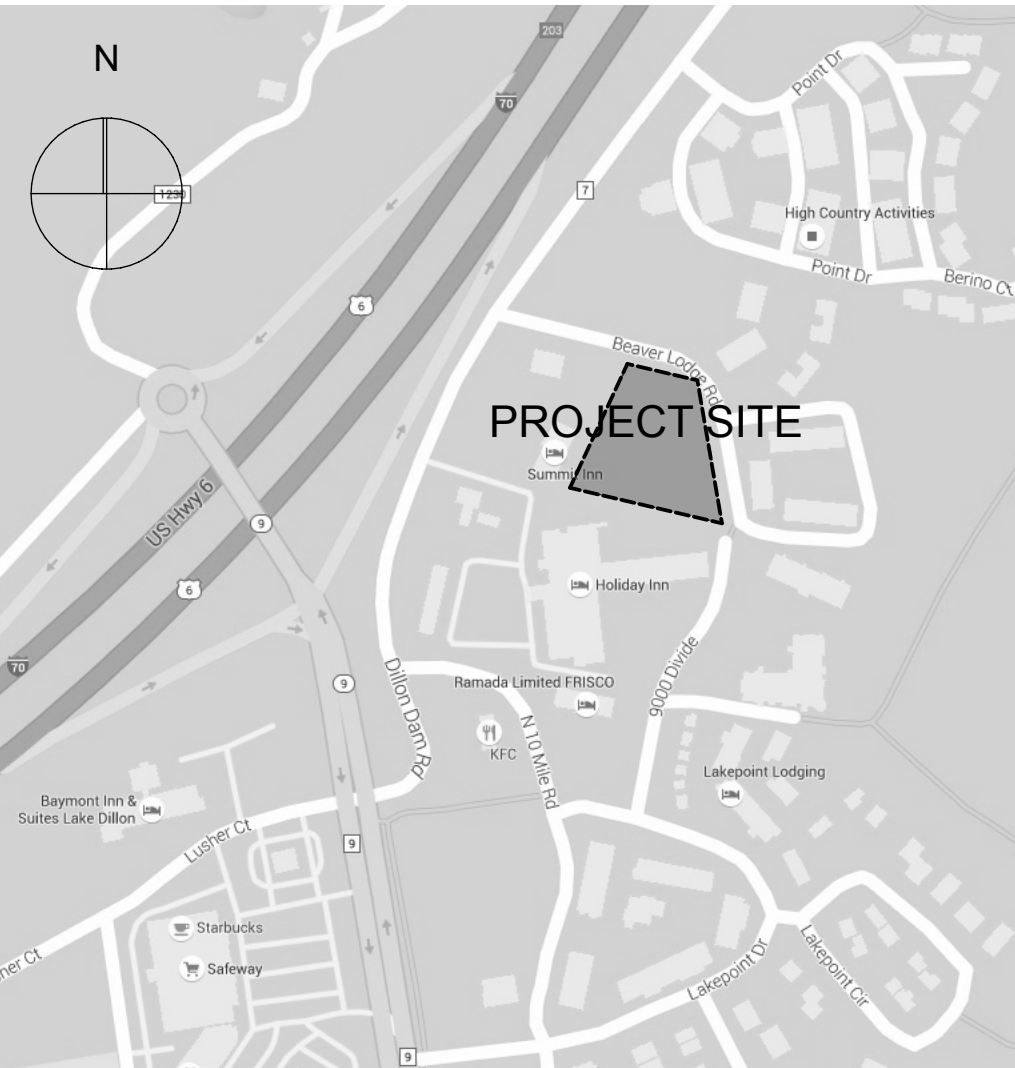

VICINITY MAP
NO SCALE

MICHAEL SHULT
ARCHITECT


PO Box 2745
975 N Ten Mile Dr. E9
Frisco, CO 80443
970.390.4298
michael@shultarchitect.com

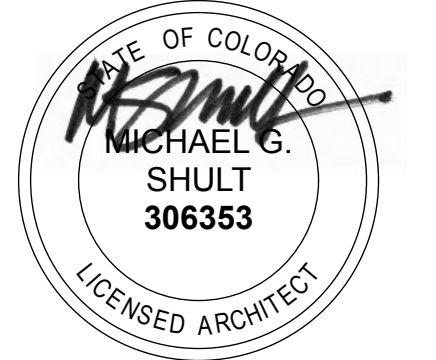

MAY 12, 2025

PROPOSED MULTI-FAMILY PROJECT FOR:
THE LANDING
LOT 6-7 RAIN TREE TWO
FRISCO, COLORADO

A1.0



A	Point	Natural Grade	Finished Grade	NA	Roof Elevation	Calculation	Height	Notes
A.1		9056.80		Natural Grade	9091.47	-9056.80	34.67	Sloped
		9059.50	9060.75	Natural Grade	9092.21	-9059.50	32.71	Sloped
	A.3	9055.20	9050.00	Finished Grade	9085.00	-9050.00	35.00	Flat
	A.4	9058.00	9059.00	Natural Grade	9086.00	-9058.00	28.00	Flat
B.1		9057.00	NA	Natural Grade	9089.88	-9057.00	32.88	Sloped
	B.2	9061.70	9059.00	Finished Grade	9092.71	-9059.00	33.71	Sloped
	B.3	9054.30	9048.50	Finished Grade	9083.50	-9048.50	35.00	Flat
	B.4	9060.20	9058.70	Finished Grade	9084.50	-9058.70	25.80	Flat
C.1		9050.00	NA	Natural Grade	9089.38	-9050.00	39.38	Sloped
	C.2	9053.90	9053.70	Natural Grade	9092.21	-9053.90	38.31	Sloped
	C.3	9049.00	9048.00	Finished Grade	9083.00	-9049.00	35.00	Flat
	C.4	9053.00	9054.00	Natural Grade	9084.00	-9053.00	31.00	Sloped
D.1		9044.50	NA	Natural Grade	9088.88	-9044.50	44.38	Sloped
	D.2	9045.00	NA	Natural Grade	9091.21	-9045.00	46.21	Sloped
	D.3	9043.80	9047.50	Natural Grade	9083.50	-9043.80	39.70	Flat
	D.4	9044.30	9047.50	Natural Grade	9082.50	-9044.30	38.20	Flat
E.1		9044.50	NA	Natural Grade	9088.88	-9044.50	44.38	Sloped
	E.2	9044.80	NA	Natural Grade	9091.21	-9044.80	46.41	Sloped
	E.3	9044.20	9047.50	Natural Grade	9083.50	-9044.20	39.30	Flat
	E.4	9044.30	9047.50	Natural Grade	9082.50	-9044.30	38.20	Flat
F.1		9043.00	NA	Natural Grade	9087.88	-9043.00	44.88	Sloped
	F.2	9042.00	9042.00	Natural Grade	9090.21	-9042.00	47.71	Sloped
	F.3	9043.10	9046.50	Natural Grade	9082.50	-9043.10	39.40	Flat
	F.4	9042.30	9045.00	Natural Grade	9081.50	-9042.30	39.20	Flat

Silengo Townhome 5 Composite.pln; A1.2 Site / Parking Plan; 100%; 5/13/25, 2:58 AM



PLANT LIST


Trees		
Common Name	Botanical name	
Aspen	Populus Tremuloides	
14	2" Caliper	
14	3" Caliper	
28	Total	
Narrowleaf Cottonwood	Populus Angustifolia	
13	2" Caliper	
14	3" Caliper	
27	Total	
Blue Spruce	Picea Pungens	
14	6"	
07	8"	
07	10"	
28	Total	
Schubert Chokecherry	Prunus Virginiana	
13	2" Caliper	
14	3" Caliper	
27	Total	
Shrubs (5 Gallon)		
MS	21 Mountain Snowberry	Symphoricarpos oroeophilus
WR	22 Woods Rose	Rosa Woodsii
HS	21 Honeysuckle	Lonicera Involucrate

LANDSCAPE NOTES

- Strip existing topsoil from site in construction areas and stockpile topsoil for landscape use
- General contractor shall remove all debris, stumps, slash, concrete asphalt, etc, form site prior to landscape work.
- Disturbed areas on site shall receive a minimum of 3" - 4" of topsoil in preparation for landscape treatment.
- Seed disturbed area where needed with short dry grass mix. Apply starter fertilizer (18-46-0) or equivalent @ 4 lbs/1000 sf sow grass mix @ 2 lbs/1000 sf. Rake materials into soil.
- Cobble rock or rock from site may be used as a ground cover treatment in designated areas with weed barrier fabric. Approximately 3'-6' diameter
- Boulders recovered during construction (2' and larger in diameter) to be stockpiled on site. When placed, bury 1/3 to 1/2 of each boulder.
- Locate all plant material to avoid snow shed, snow removal locations, sight lines. Utility lines, and easements.
- All new plants shall be placed under an automatic drip irrigation system.
- All plant material shall be back filled with 1/3 topsoil, 1/3 manure, 1/3 compost and mixed 50/50 with native soils.
- All shrub beds and tree wells shall receive a minimum of 3 inches shredded bark mulch
- All newly planted trees shall be root fed at the time of installation. Root feeding shall consist of a liquid root growth stimulator, or soluble fertilizer at recommended rate of 1 lbs per 1 gallon of water.
- All existing trees to remain shall be protected by construction fencing


REVEGETATION

Revegetate all disturbed areas on site.
Sow short dry grass mix @ 2 lbs/1000 sf
Short dry mix
05% Canby Bluegrass
10% Canada Bluegrass
25% Sheep Fescue
30% Creeping Red Fescue
30% Hard Fescue
Slopes over 3:1 shall be hayed tackified or netted.

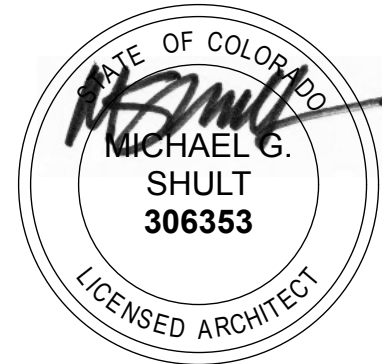


GRAPHIC SCALE

(IN FEET)
1 inch = 20ft




24' ACCESS EASEMENT (PER PLAT)

**MOUNTAIN
MEADOWS
CONDOMINIUMS**
(BK. 207 PG. 874)

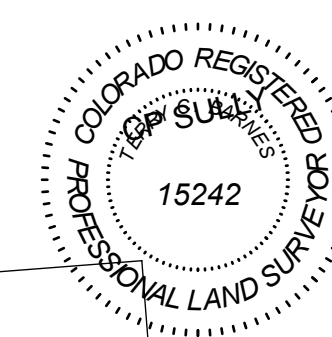


Drawn TCB	Dwg 18175TP.DWG	Project 18175
Checked TCB	Date 10/15/03	Sheet 2 of 2



RANGE WEST
ENGINEERS & SURVEYORS
INC.

P.O. Box 589
Silverthorne, CO 80498 970-468-6281

A SLOPE ANALYSIS OF
LOTS 5 – 7, RAINTREE TWO
TOWN OF FRISCO, SUMMIT COUNTY, COLORADO
SHEET 1 OF 1

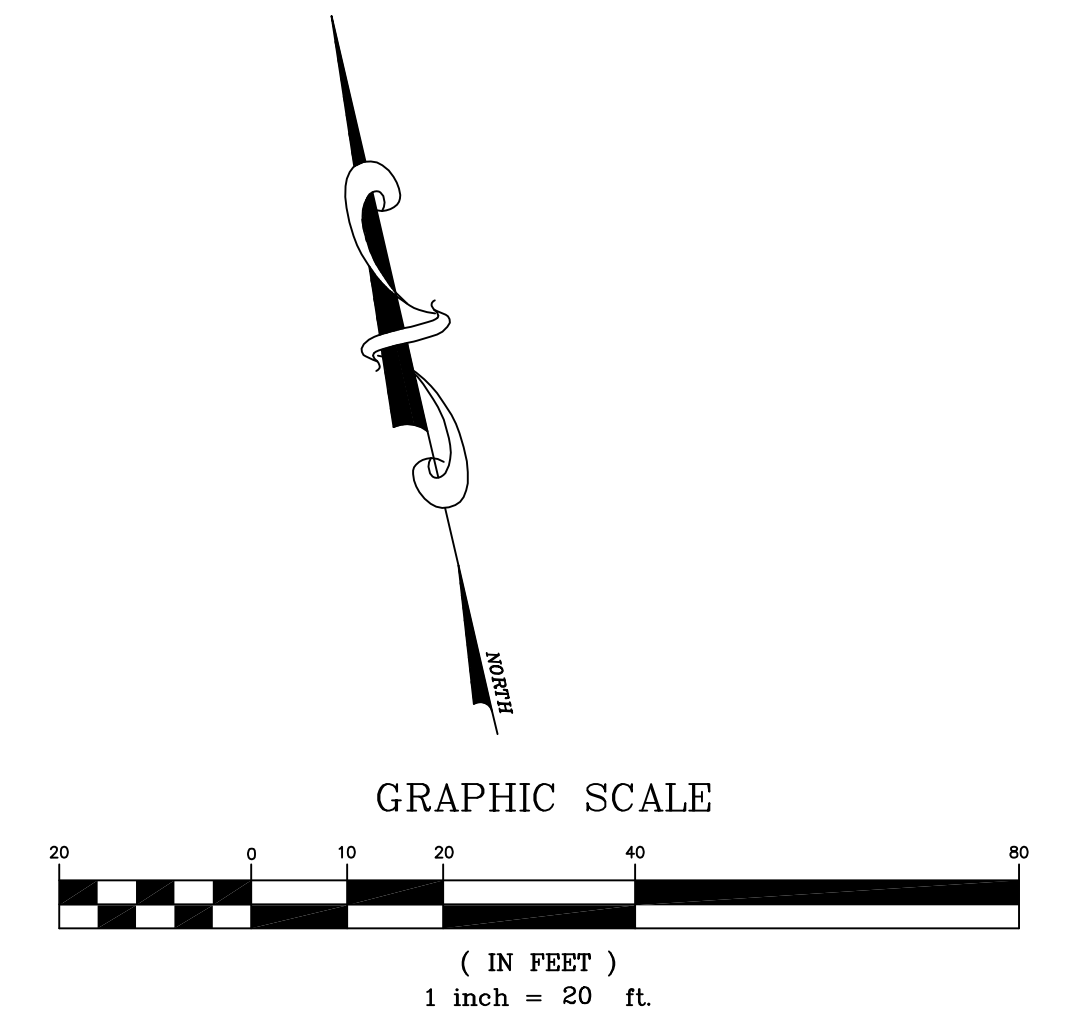

ELEVATIONS BASED ON U.S.G.S. MEAN SEA LEVEL DATUM
DATE OF FIELD SURVEY: SEPT./OCT. 2003
CONTOUR INTERVAL = 2 FEET

- LEGEND**
- FOUND No. 4 REBAR & YELLOW PLASTIC CAP (PLS 10847)
 - FOUND No. 4 REBAR
 - ⊙ SEWER MANHOLE
 - ⊙ WATER VALVE
 - ⊙ FIRE HYDRANT
 - UTILITY PEDESTAL
 - ⊙ UTILITY POLE
 - CP-△ RANDOM SURVEY CONTROL POINT
 - ⊙ TRANSFORMER
 - 69.2 x SPOT ELEVATION
 - 8" PINE TREE WITH TRUNK DIAMETER
 - 3" ASPEN TREE WITH TRUNK DIAMETER
 - LOCATED ALL 6" & LARGER PINES
 - LOCATED ALL 3" & LARGER ASPENS

- Slope Legend**
- 15% TO 30% SLOPE
 - 30% OR GREATER SLOPE

LOT 5 SLOPE TABLE

TOTAL LOT AREA OF LOT 5	31,156 sq. ft.	(100%)
NO SLOPES OVER 15%		

LOT 6 SLOPE TABLE

TOTAL LOT AREA OF LOT 6	35,823 sq. ft.	(100%)
15% TO 30% SLOPE	8,045 sq. ft.	(22%)
NO SLOPES OVER 30%		

LOT 7 SLOPE TABLE

TOTAL LOT AREA OF LOT	28,635 sq. ft.	(100%)
15% TO 30% SLOPE	16,175 sq. ft.	(57%)
30% OR OVER SLOPE	264 sq. ft.	(1%)


CURVE TABLE					
CURVE	RADIUS	LENGTH	CHORD	BEARING	DELTA
C1	75.00'	66.90'	64.71'	N 68°30'20" W	51°06'39"
C2	75.00'	49.40'	48.57'	S 24°03'22" E	37°47'17"
C3	75.00'	47.59'	46.80'	S 13°01'02" W	36°21'32"
C4	30.00'	28.88'	27.78'	S 03°37'11" W	55°09'14"
C5	70.00'	65.01'	62.70'	S 50°33'54" E	53°12'55"
C6	130.00'	68.42'	65.70'	N 62°32'10" W	29°16'22"

LINE TABLE		
LINE	DIRECTION	DISTANCE
L1	S 23°57'26" E	3.13'


Drawn TCB/RLB	Dwg 18175-S2	Project 18175
Checked TCB	Date 09/15/05	Sheet 1 of 1

R-A-N-G-E-W-E-S-T
ENGINEERS & SURVEYORS INC.


P.O. Box 589
Silverthorne, CO 80498 970-468-6281

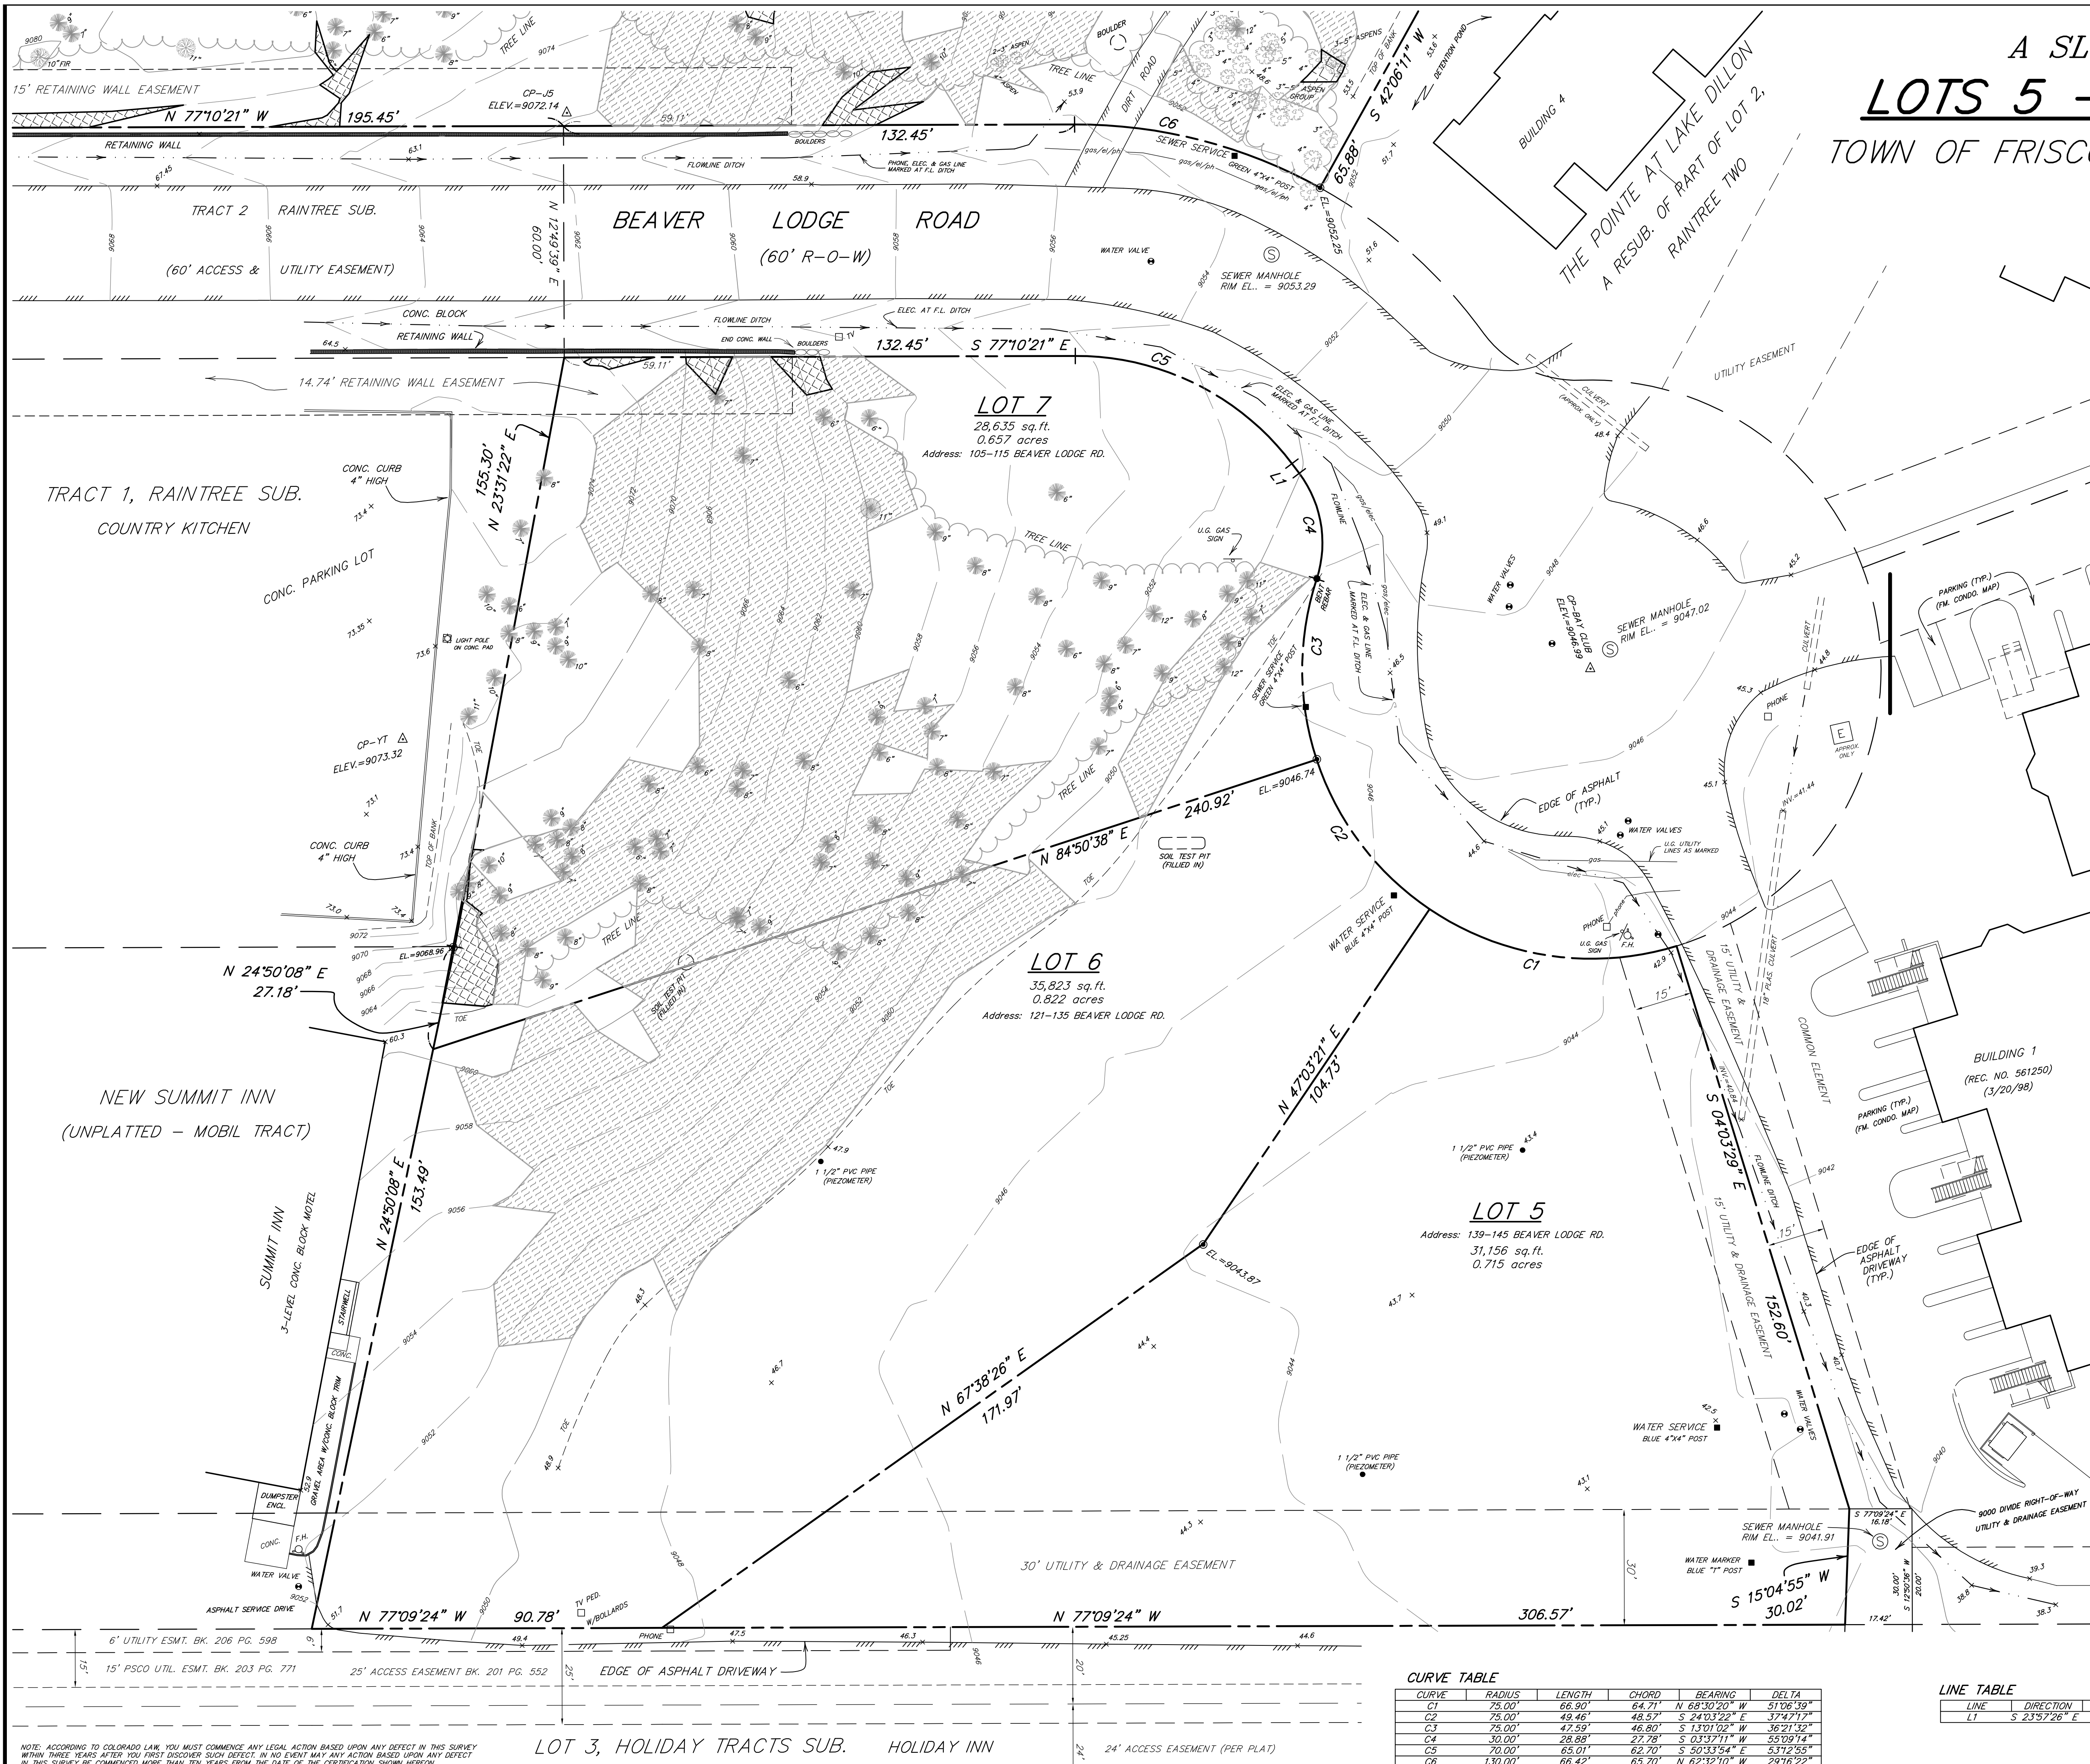

NOTE: ACCORDING TO COLORADO LAW, YOU MUST COMMENCE ANY LEGAL ACTION BASED UPON ANY DEFECT IN THIS SURVEY WITHIN THREE YEARS AFTER YOU FIRST DISCOVER SUCH DEFECT. IN NO EVENT MAY ANY ACTION BASED UPON ANY DEFECT IN THIS SURVEY BE COMMENCED MORE THAN TEN YEARS FROM THE DATE OF THE CERTIFICATION SHOWN HEREON.

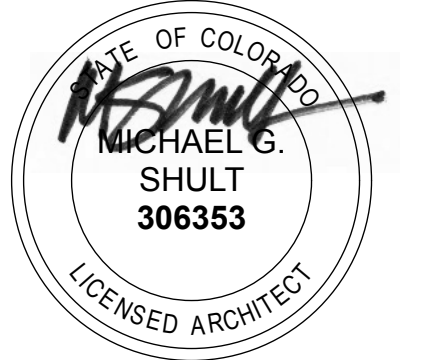


MAY 12, 2025

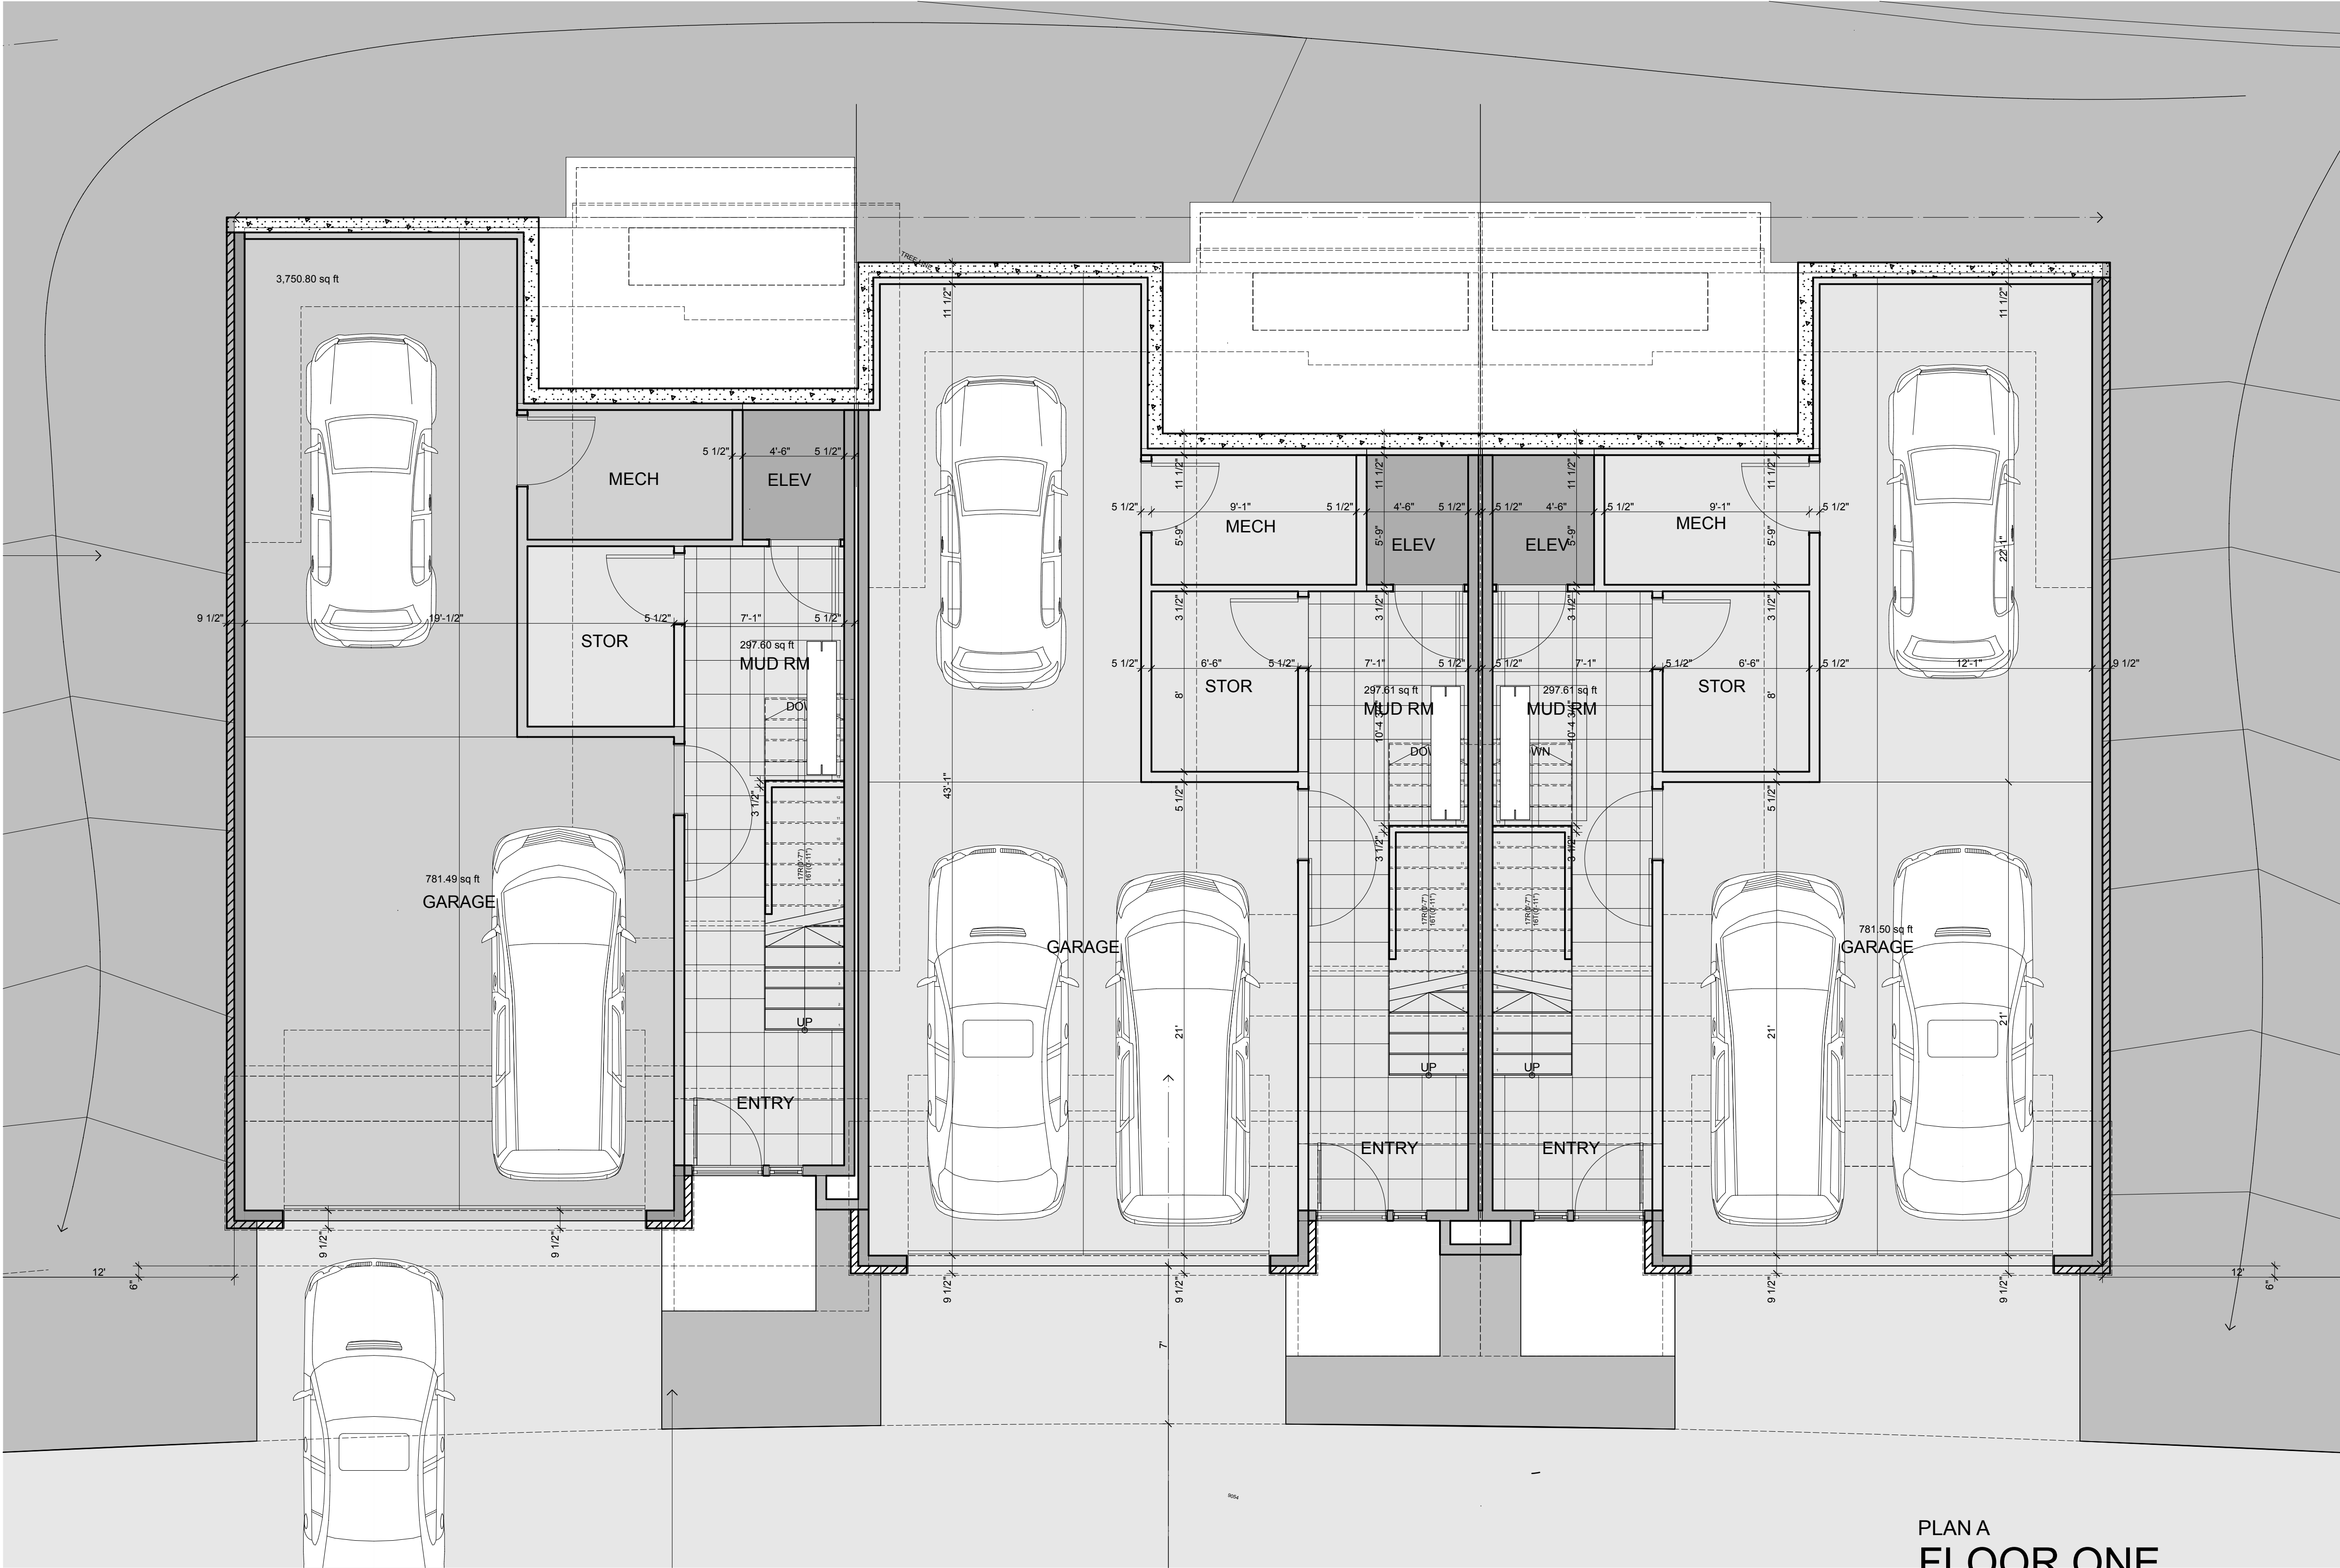


PROPOSED MULTI-FAMILY PROJECT FOR:
THE LANDING
LOT 6.7 RAINTREE TWO
FRISCO, COLORADO

A2.1A

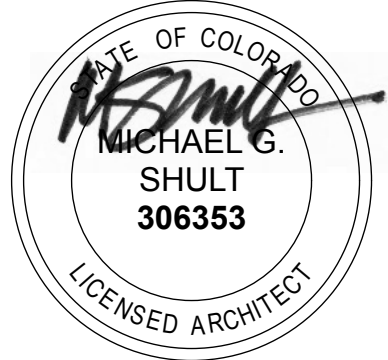

PLAN A
FLOOR TWO
SCALE: 1/4" = 1'-0"


PROPOSED MULTI-FAMILY PROJECT FOR:
THE LANDING
LOT 6.7 RAINTREE TWO
FRISCO, COLORADO

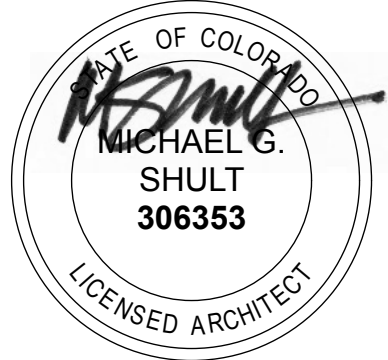


PLAN A
FLOOR THREE
SCALE: 1/4" = 1'-0"

PROPOSED MULTI-FAMILY PROJECT FOR:
THE LANDING
LOT 6.7 PINE TREE TWO
FRISCO, COLORADO

A2.3A

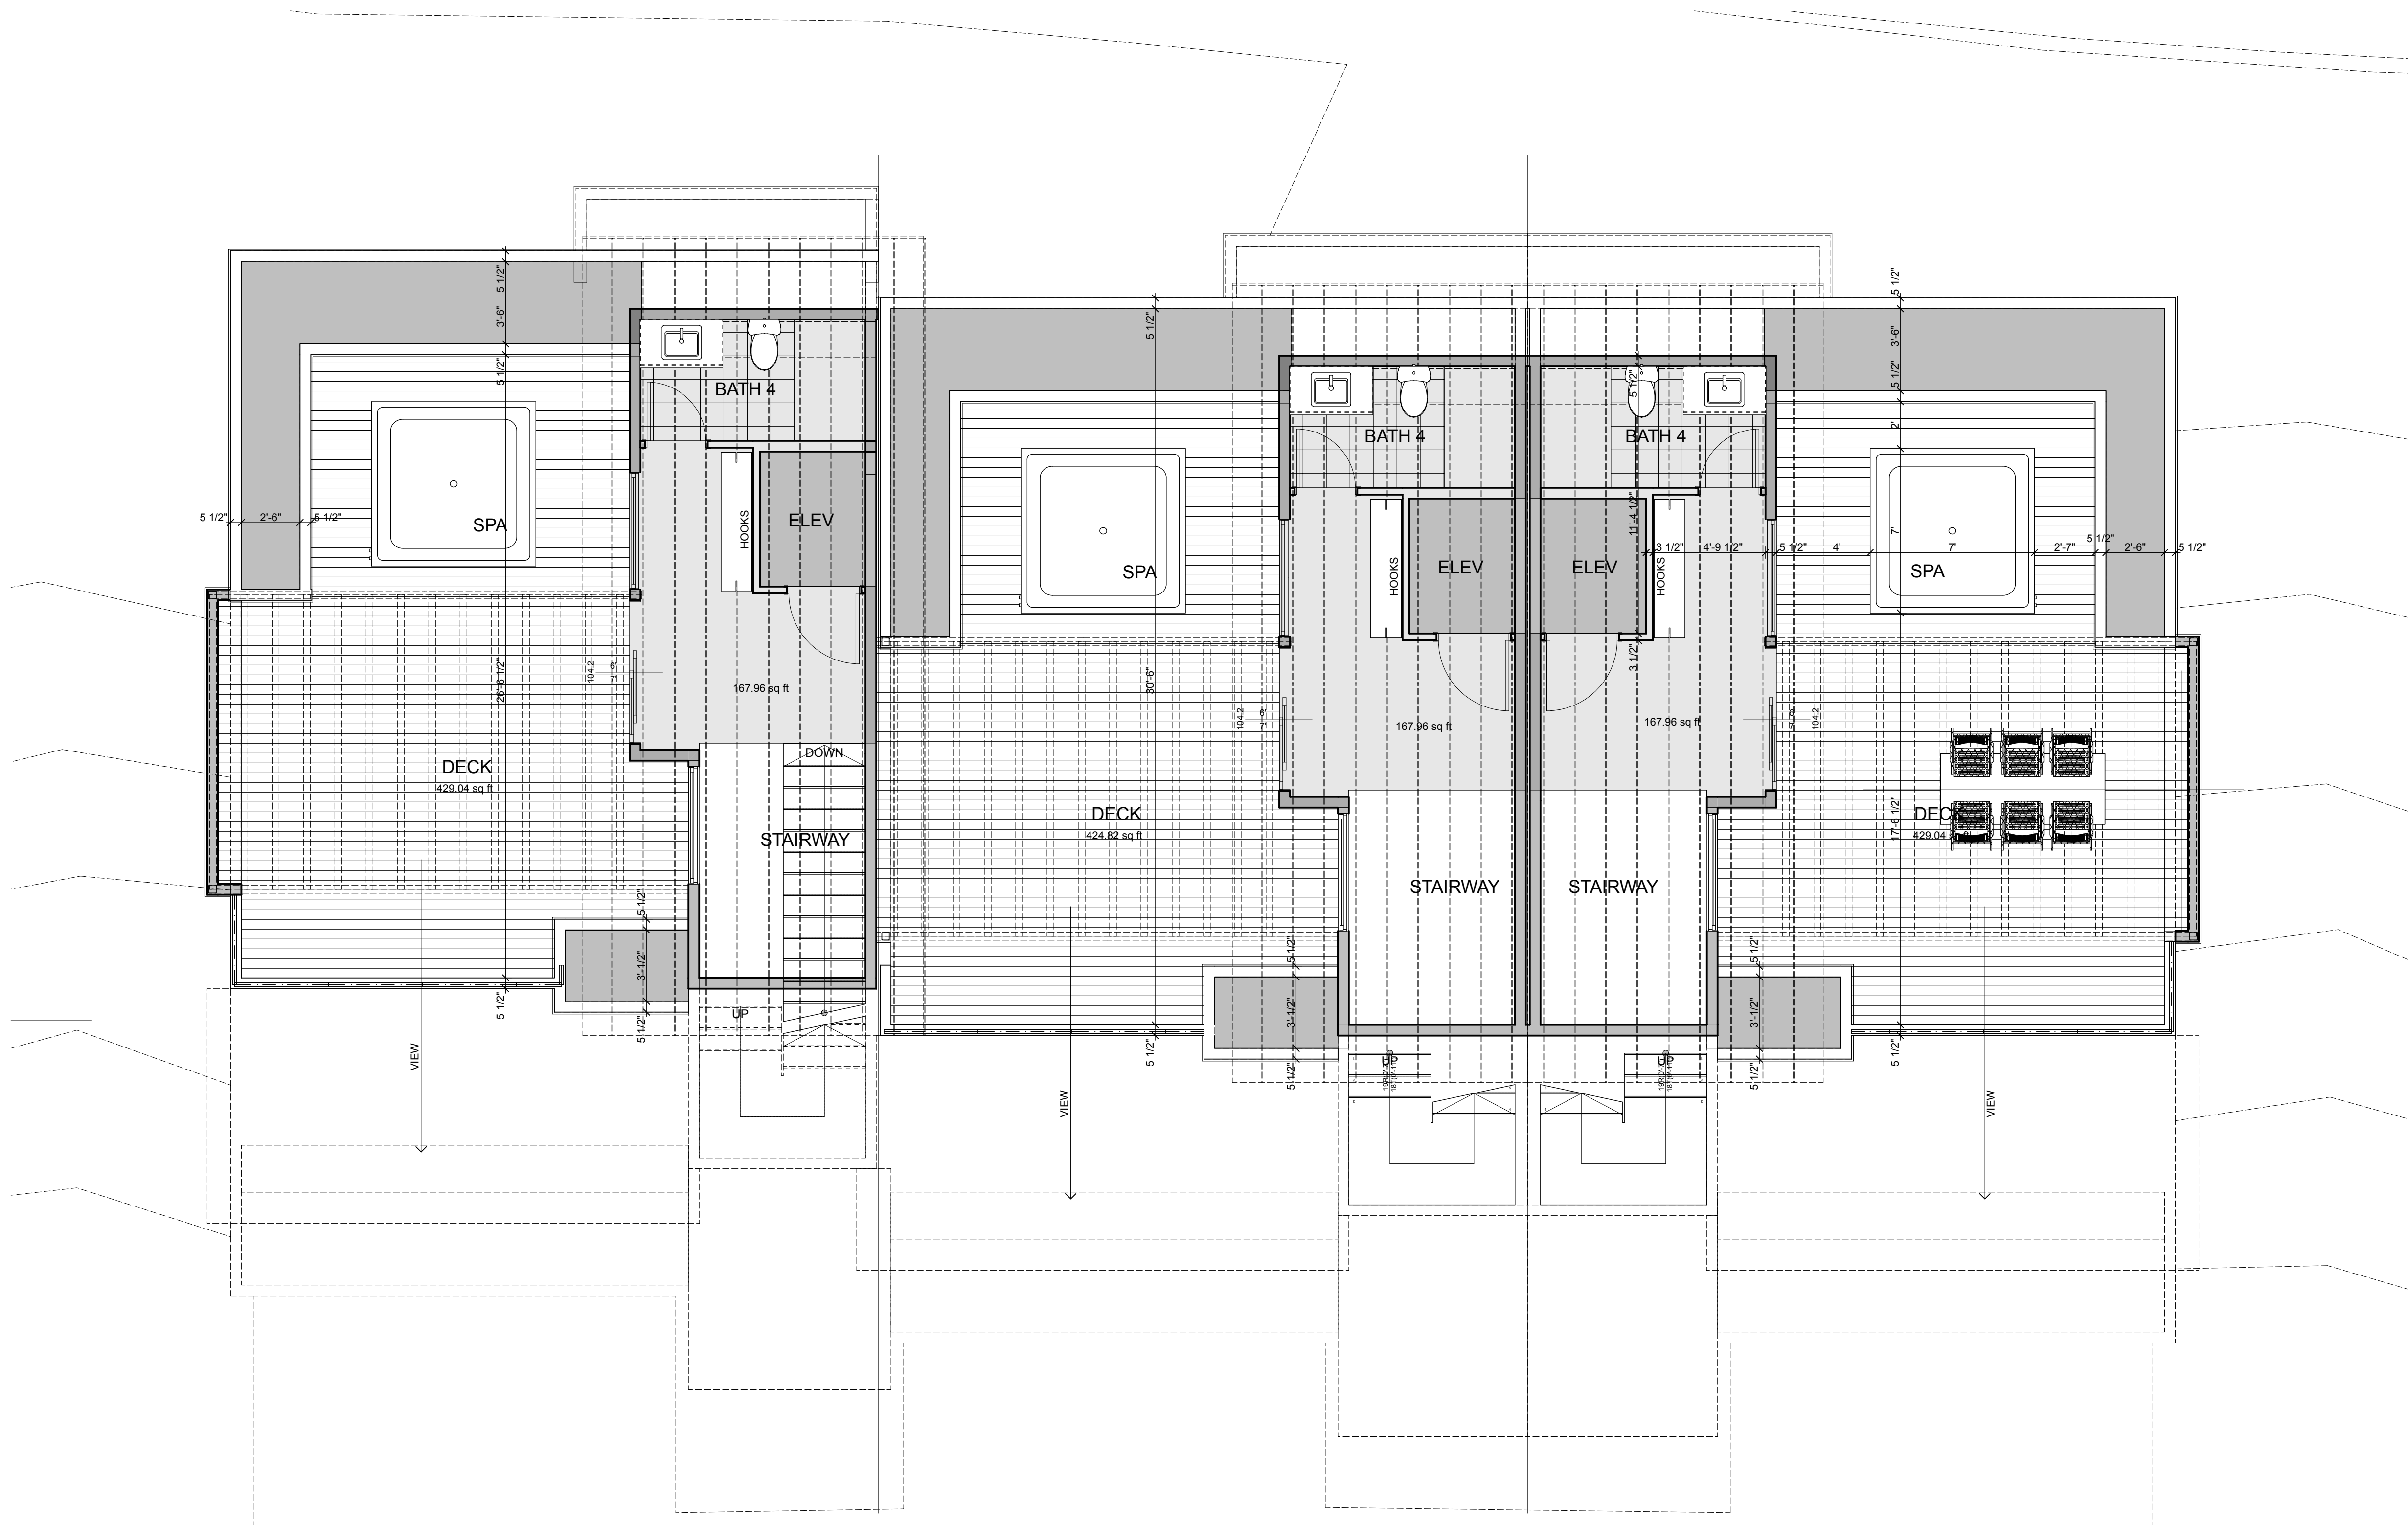



PLAN A
ROOF DECK
SCALE: 1/4" = 1'-0"

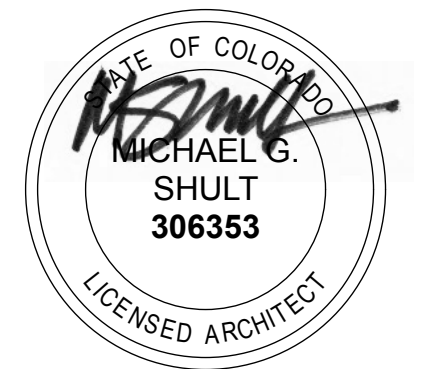

MAY 12, 2025

PROPOSED MULTI-FAMILY PROJECT FOR:
THE LANDING
LOT 6.7 RAINTREE TWO
FRISCO, COLORADO


A2.4A

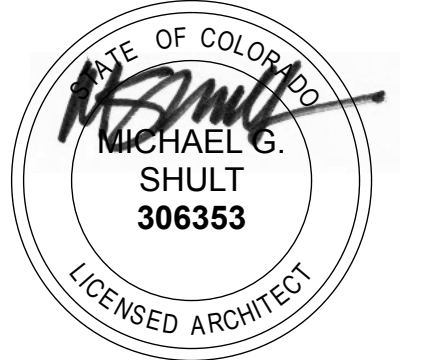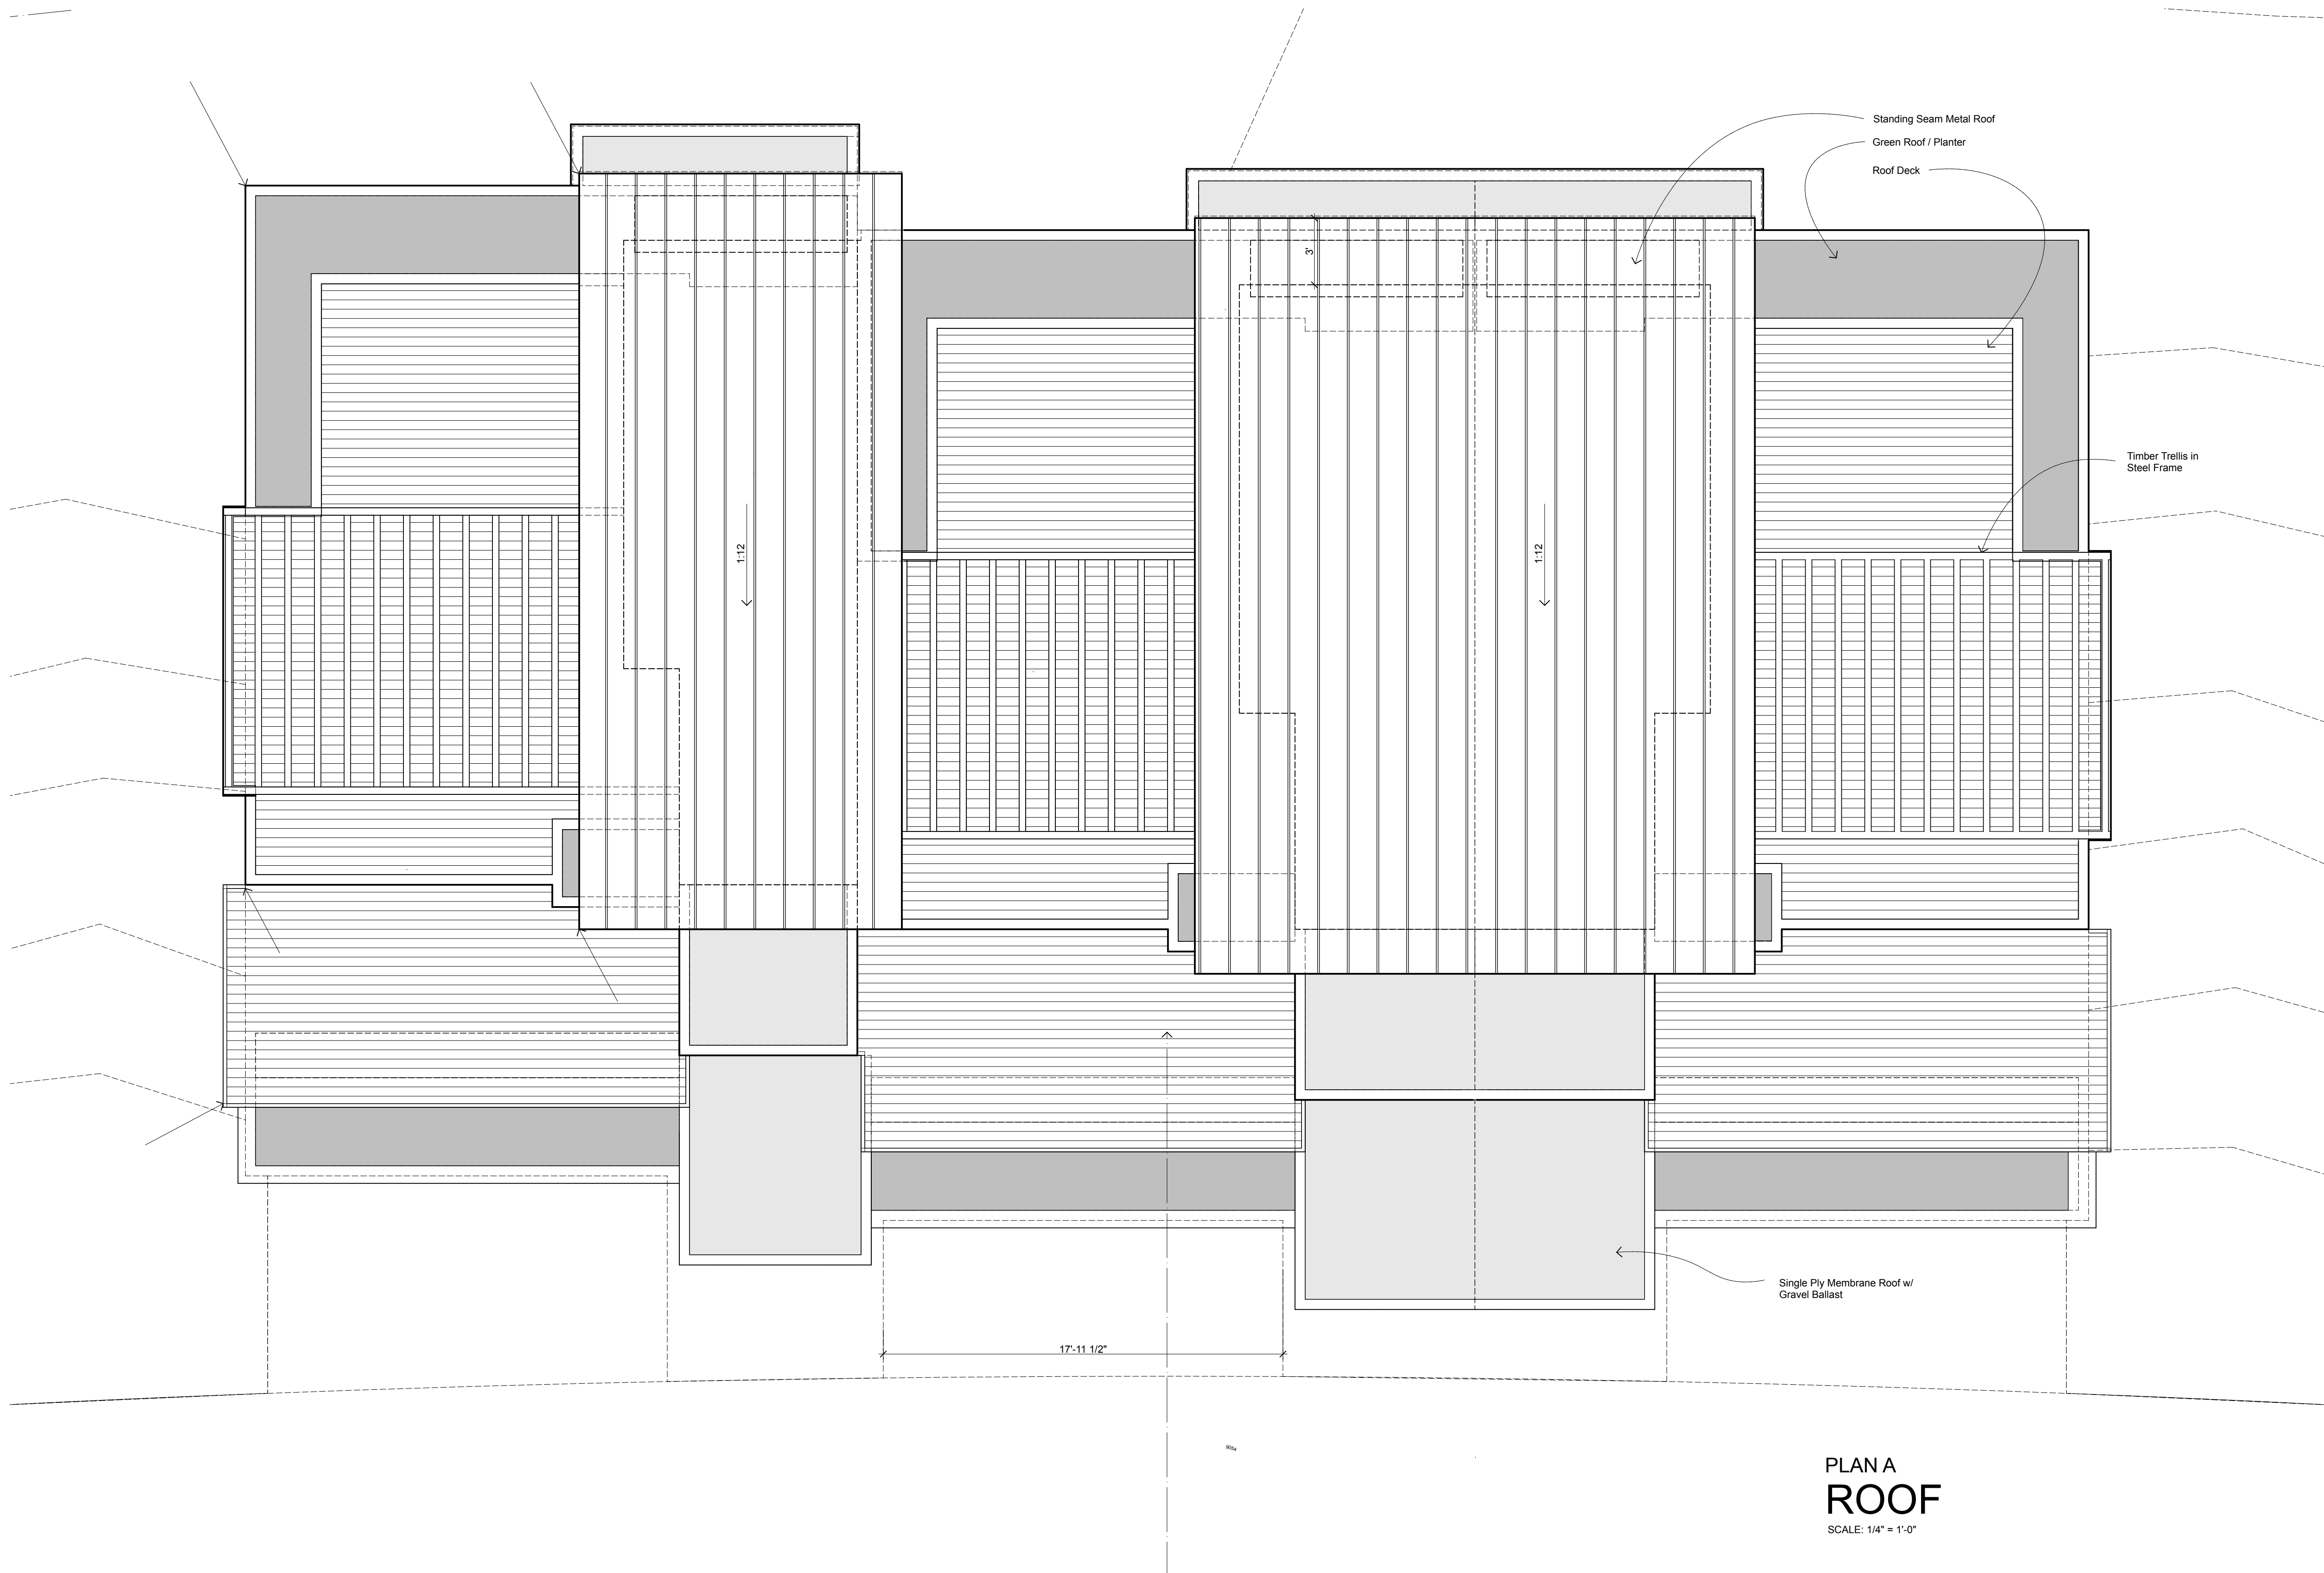

MAY 12, 2025

PROPOSED MULTI-FAMILY PROJECT FOR:
THE LANDING
LOT 6.7, RAINTREE TWO
FRISCO, COLORADO

A2.5A

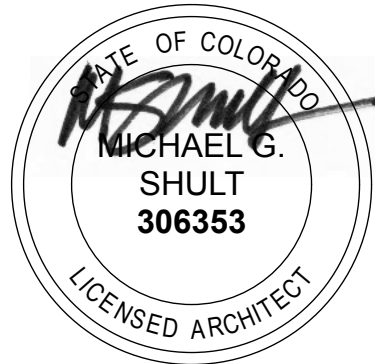


MAY 12, 2025




PLAN A
FRONT ELEVATION
SCALE: 1/4" = 1'-0"

PROPOSED MULTI-FAMILY PROJECT FOR:
THE LANDING
LOT 6.7 RAINTREE TWO
FRISCO, COLORADO

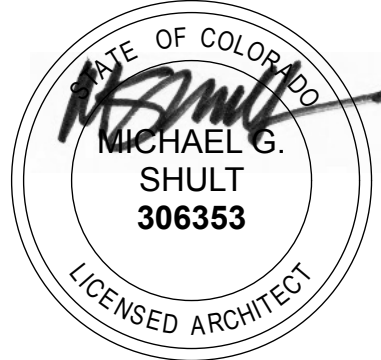


MAY 12, 2025

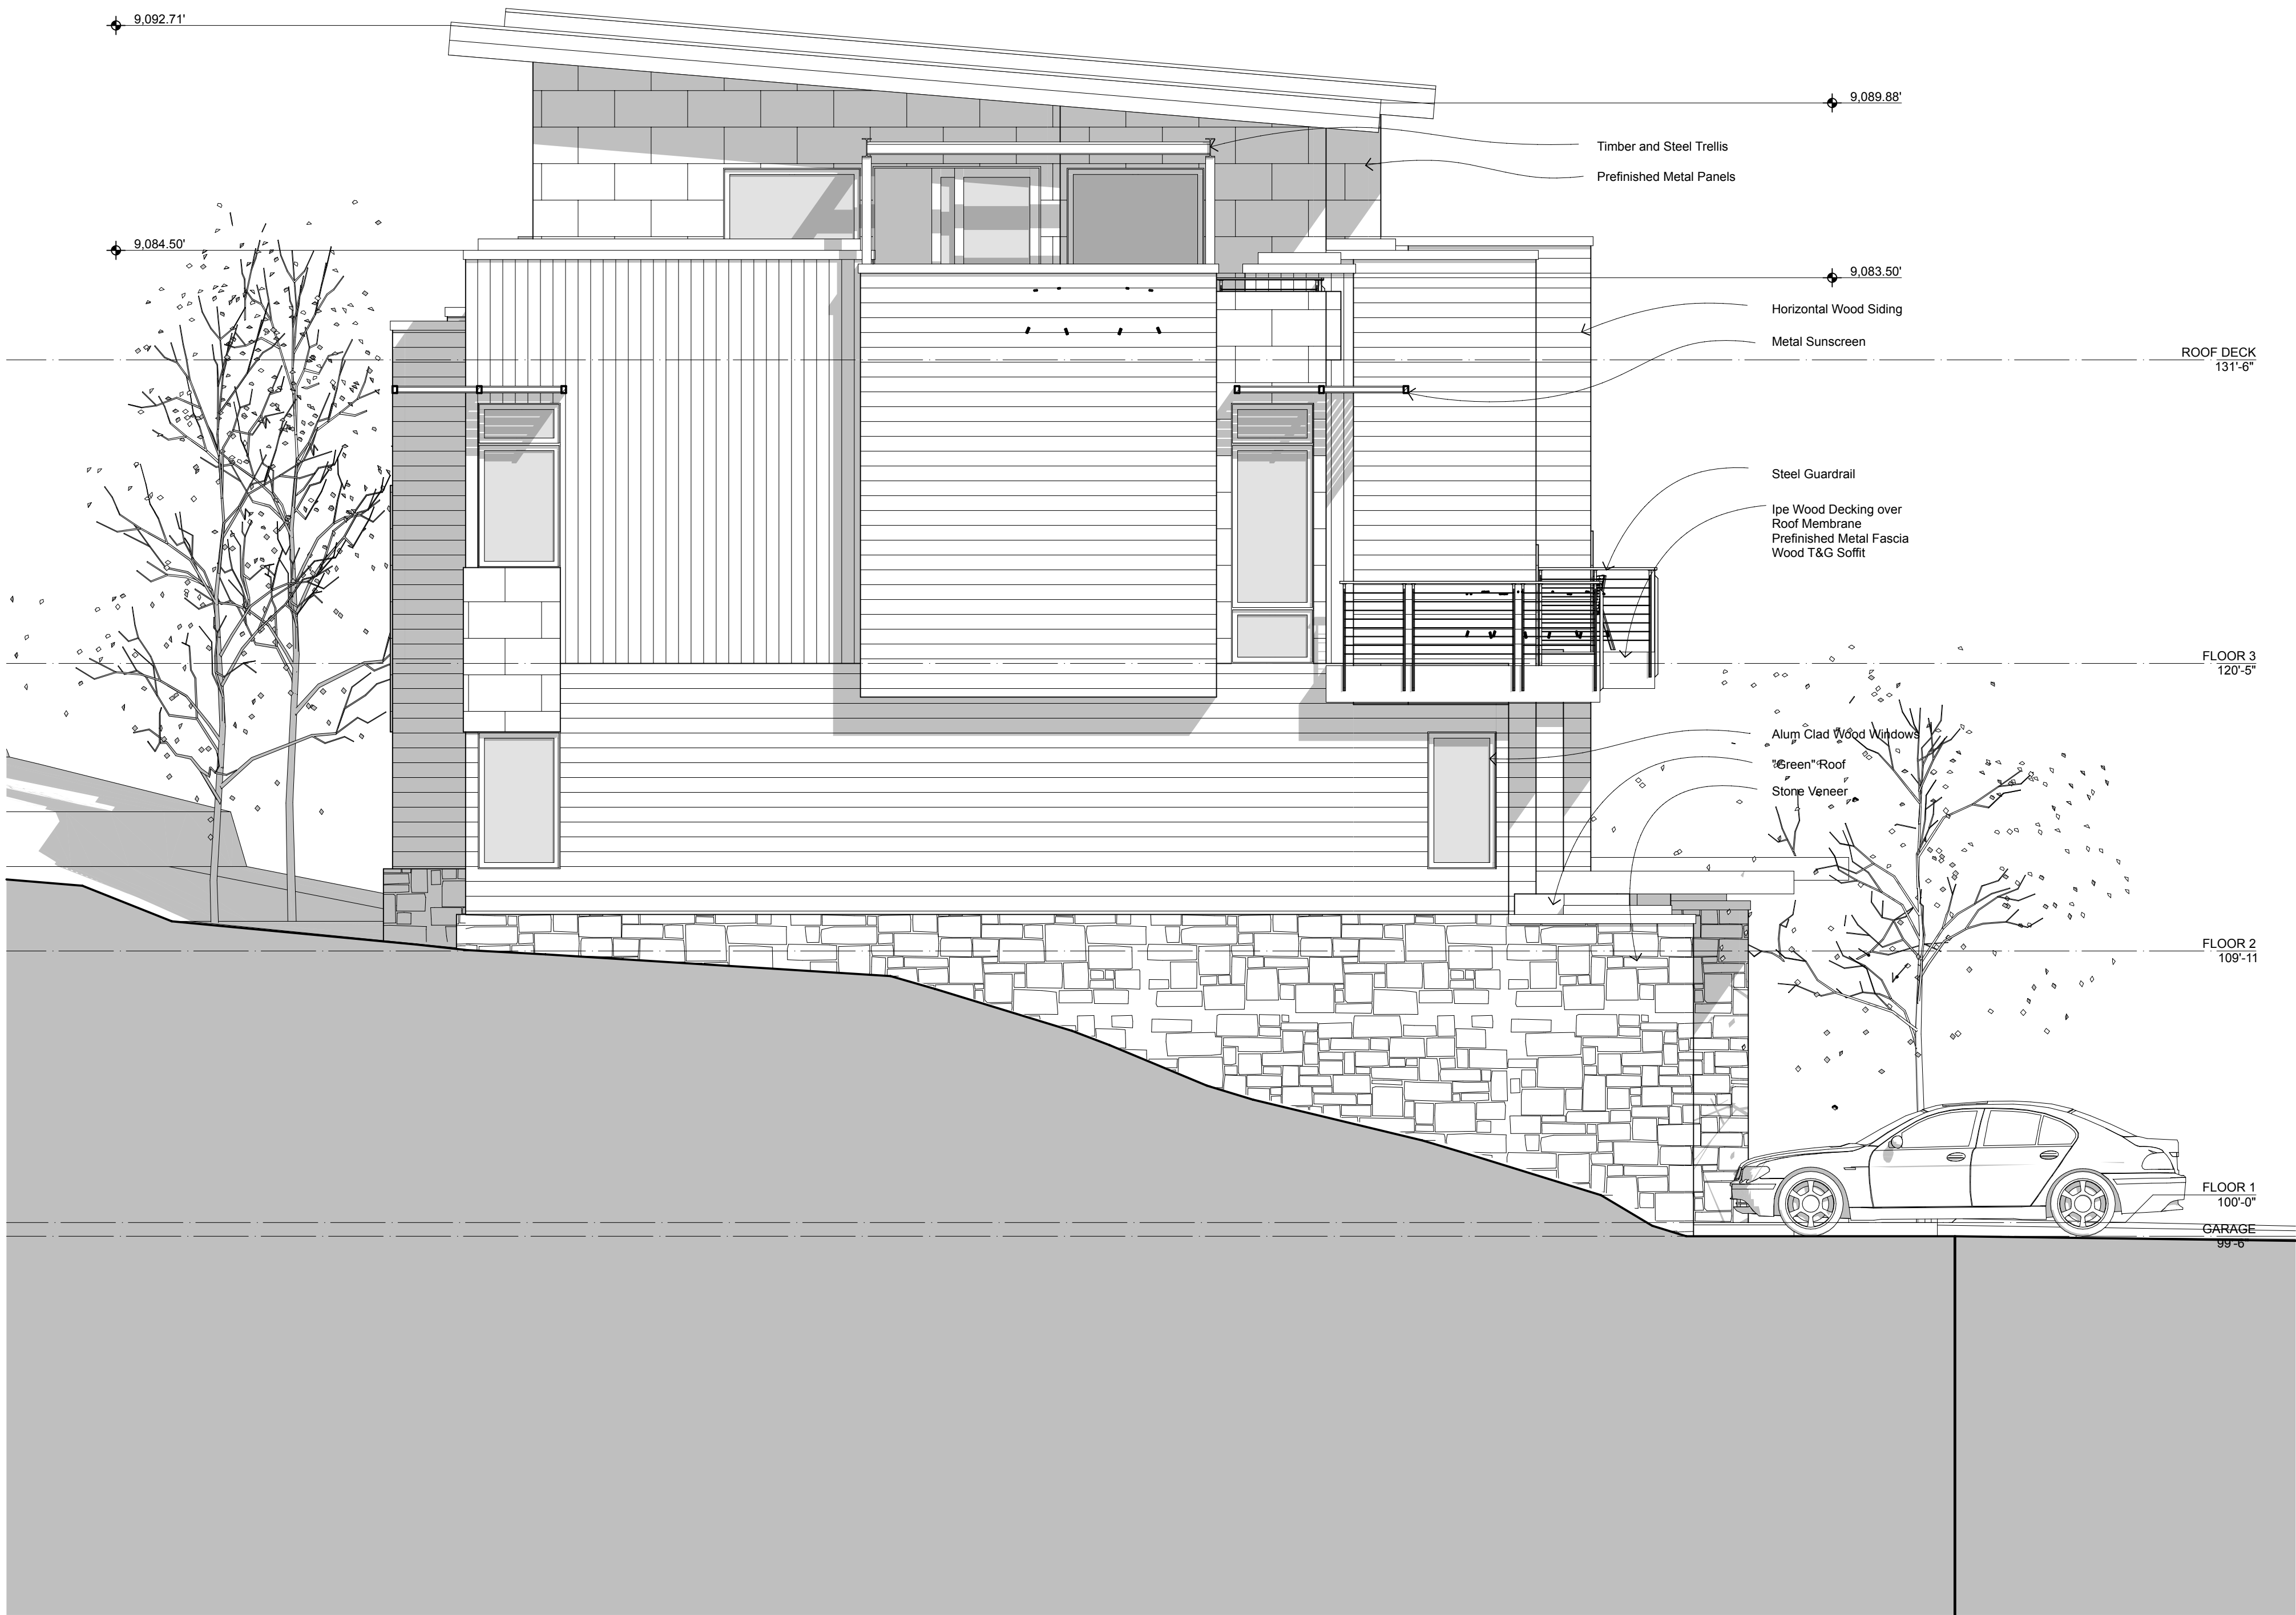

PLAN A
SIDE ELEVATION
SCALE: 1/4" = 1'-0"

PROPOSED MULTI-FAMILY PROJECT FOR:
THE LANDING
LOT 6.7 RAINTREE TWO
FRISCO, COLORADO


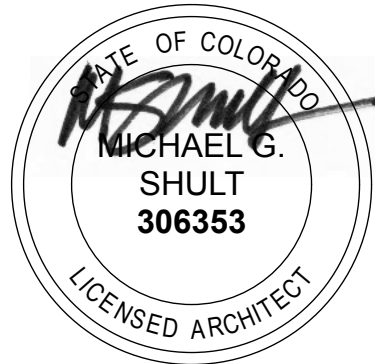


MAY 12, 2025




PLAN A
REAR ELEVATION
SCALE: 1/4" = 1'-0"

PROPOSED MULTI-FAMILY PROJECT FOR:
THE LANDING
LOT 6.7 RAINTREE TWO
FRISCO, COLORADO

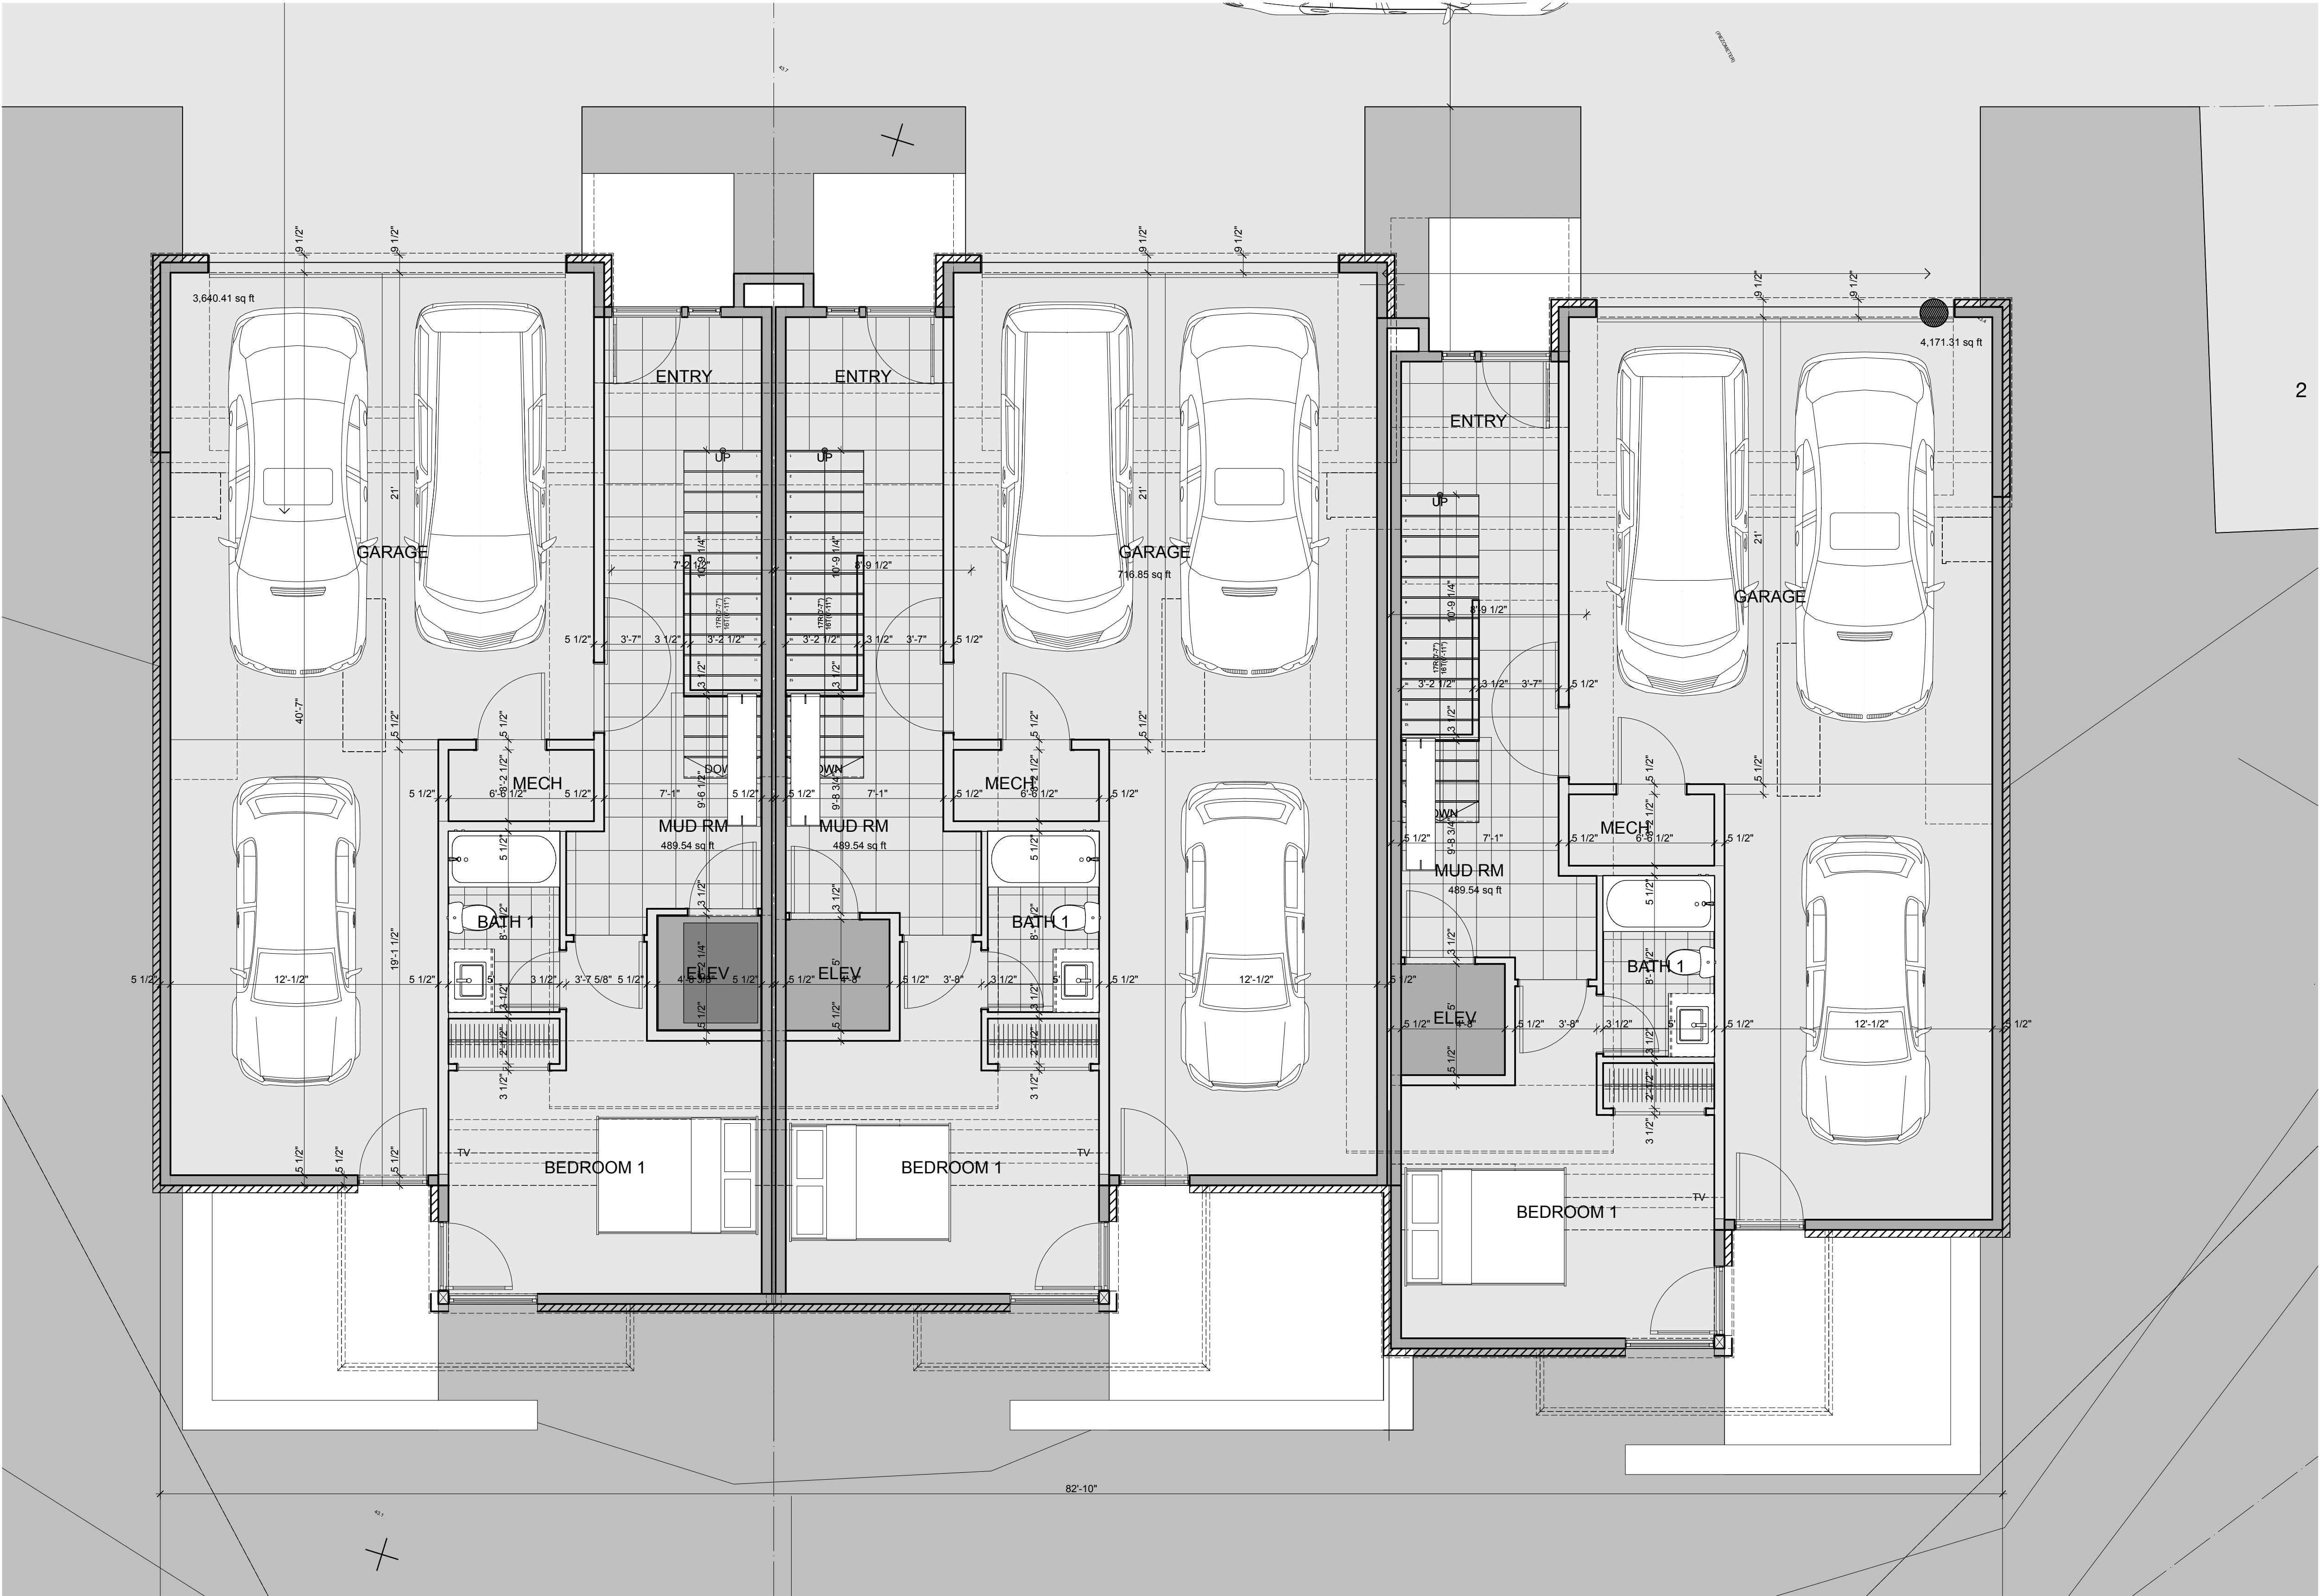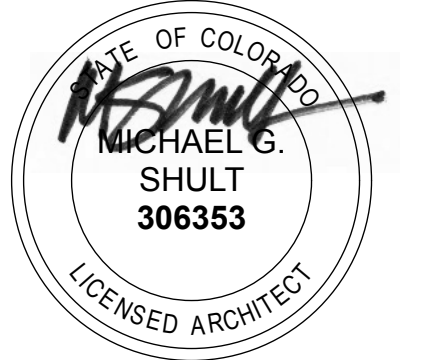

PLAN B
FLOOR ONE
SCALE: 1/4" = 1'-0"

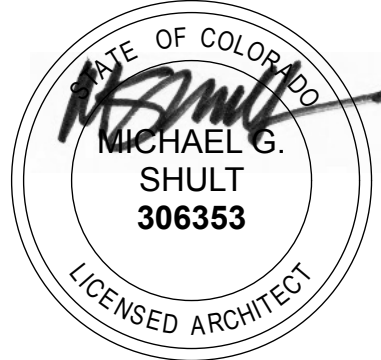

MAY 12, 2025




PLAN B
FLOOR TWO
SCALE: 1/4" = 1'-0"

PROPOSED MULTI-FAMILY PROJECT FOR:
THE LANDING
LOT 6.7 RAINTREE TWO
FRISCO, COLORADO




PLAN B
FLOOR THREE
SCALE: 1/4" = 1'-0"

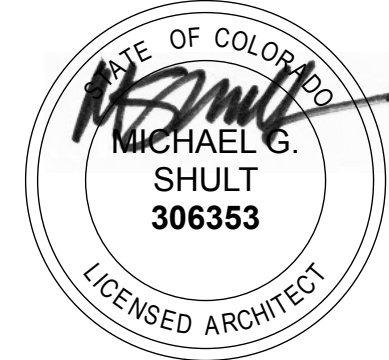


MAY 12, 2025

PROPOSED MULTI-FAMILY PROJECT FOR:
THE LANDING
LOT 6.7 RAINBOW TWO
FRISCO, COLORADO

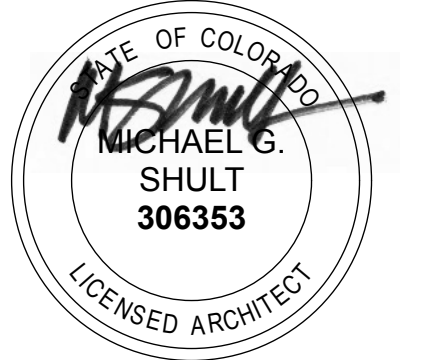


MAY 12, 2025

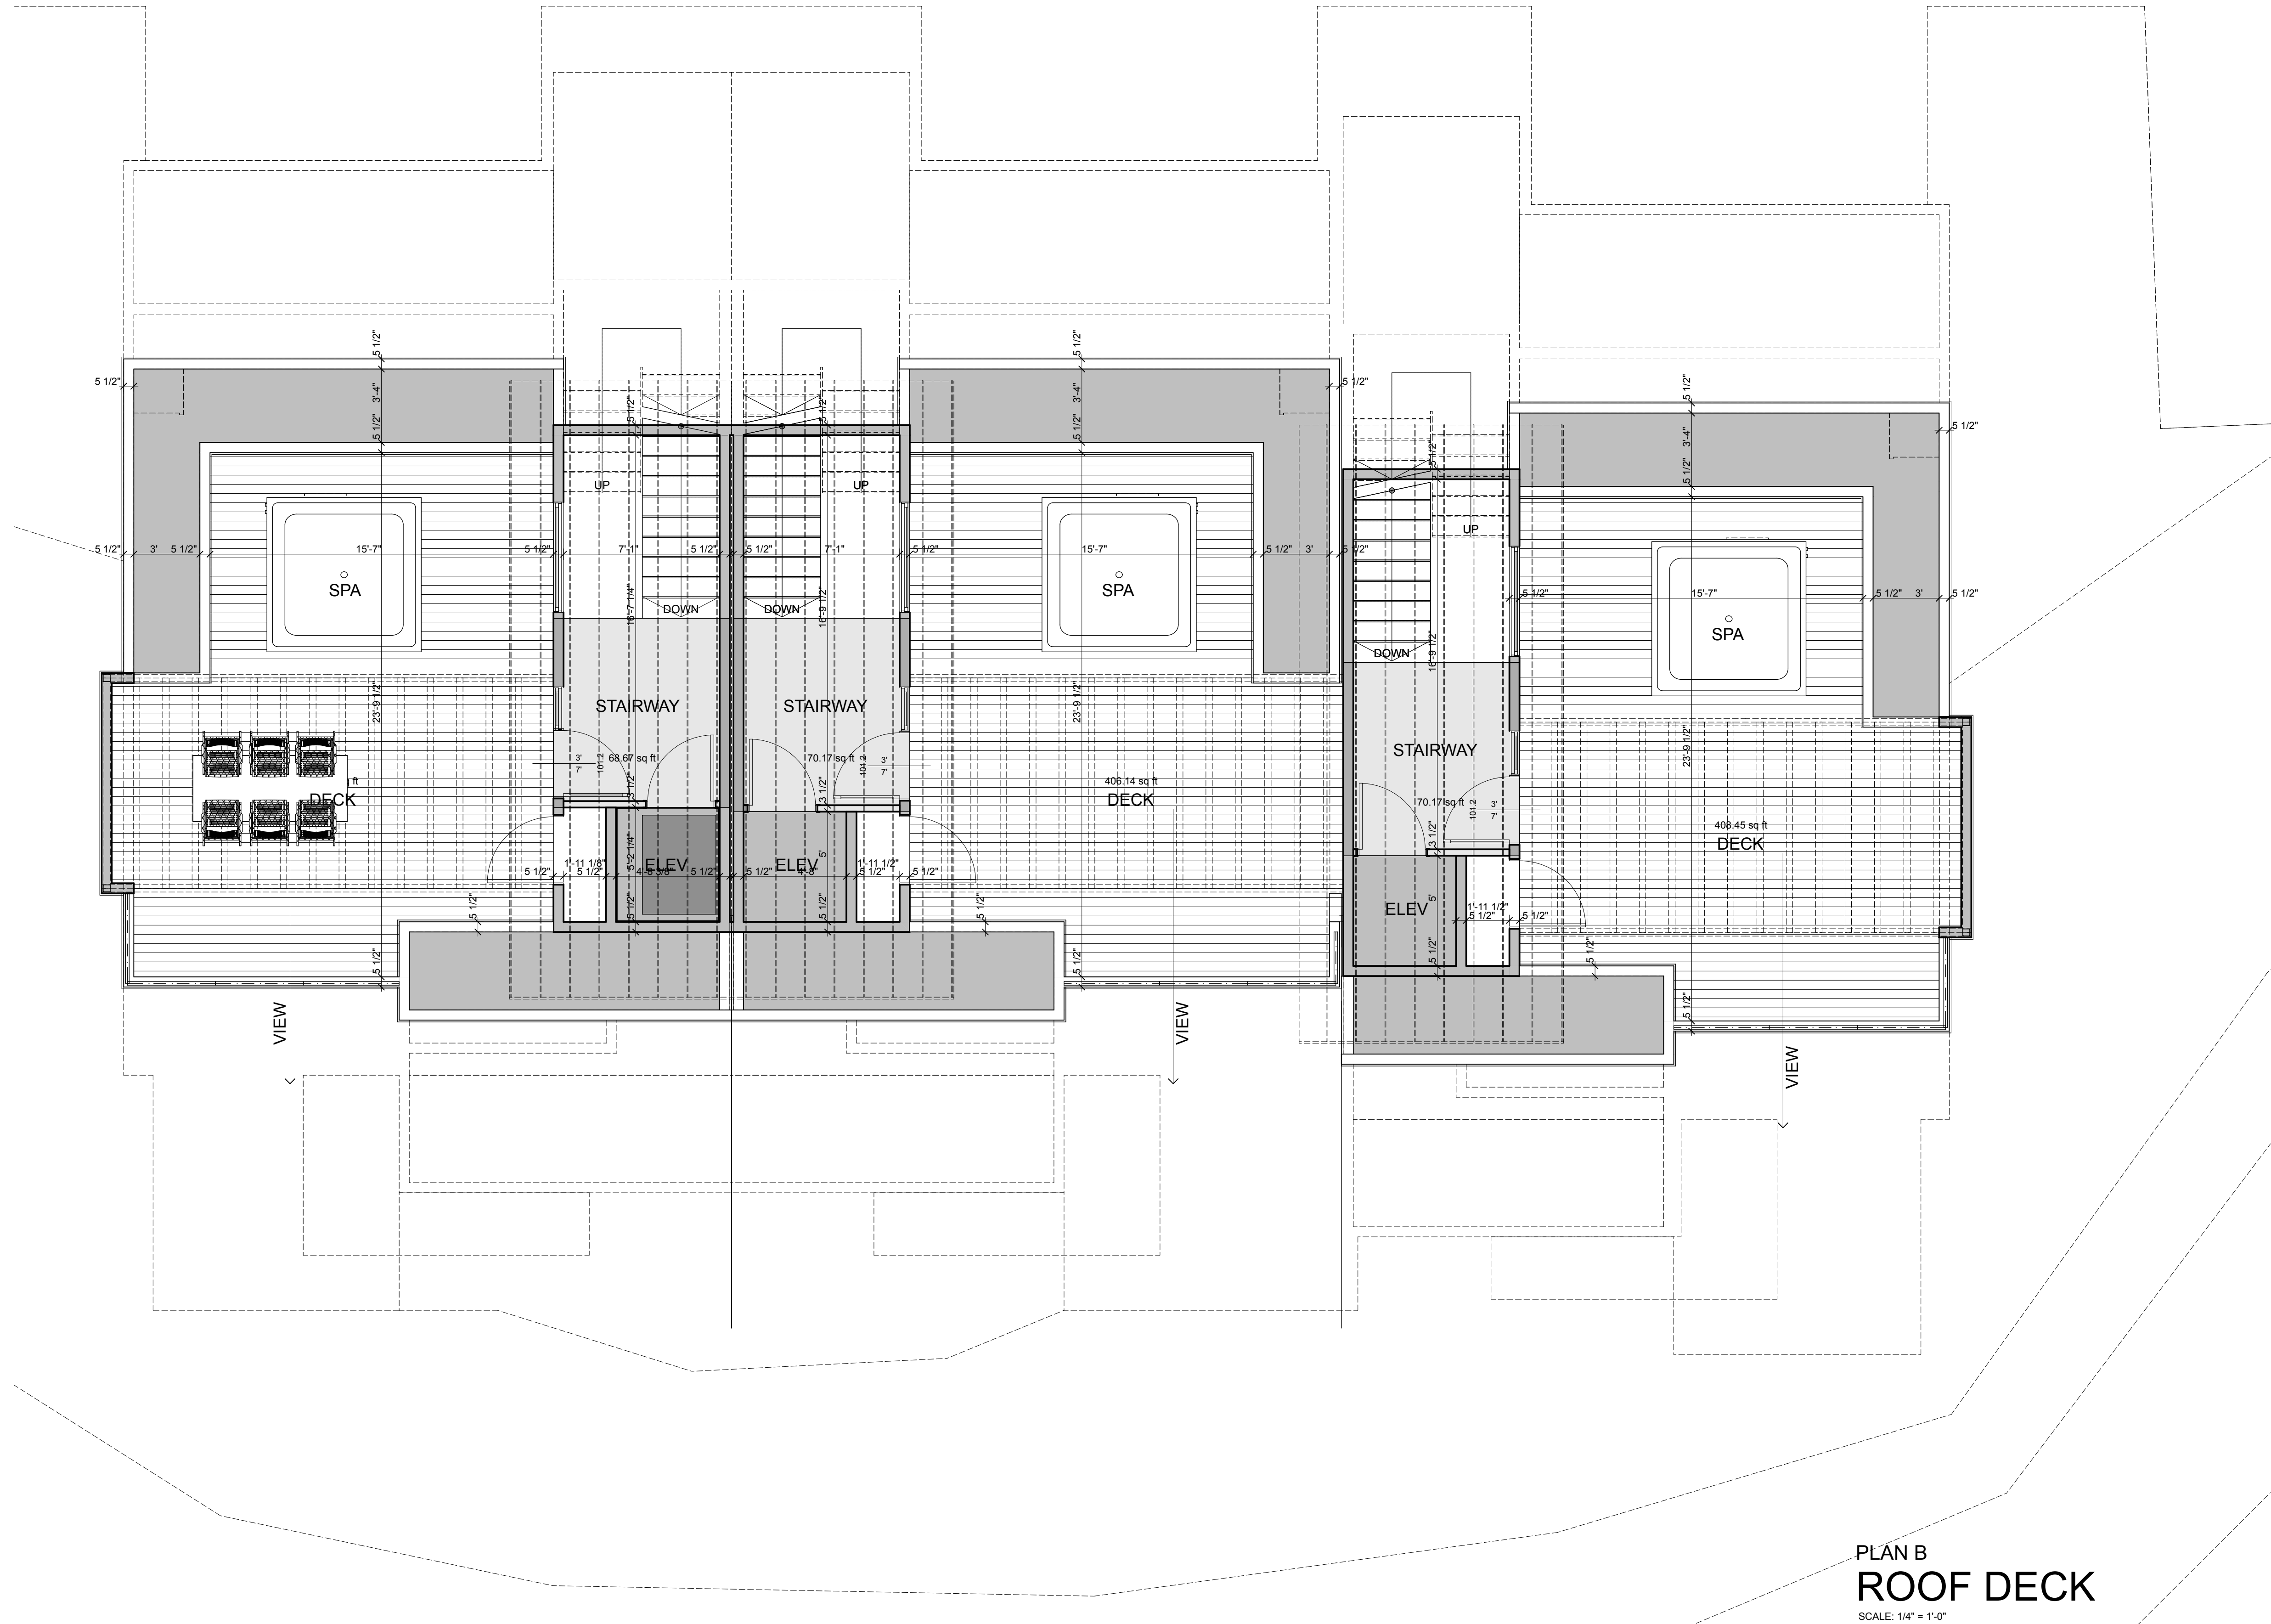


PROPOSED MULTI-FAMILY PROJECT FOR:
THE LANDING
LOT 6.7 RAINTREE TWO
FRISCO, COLORADO


A2.4B

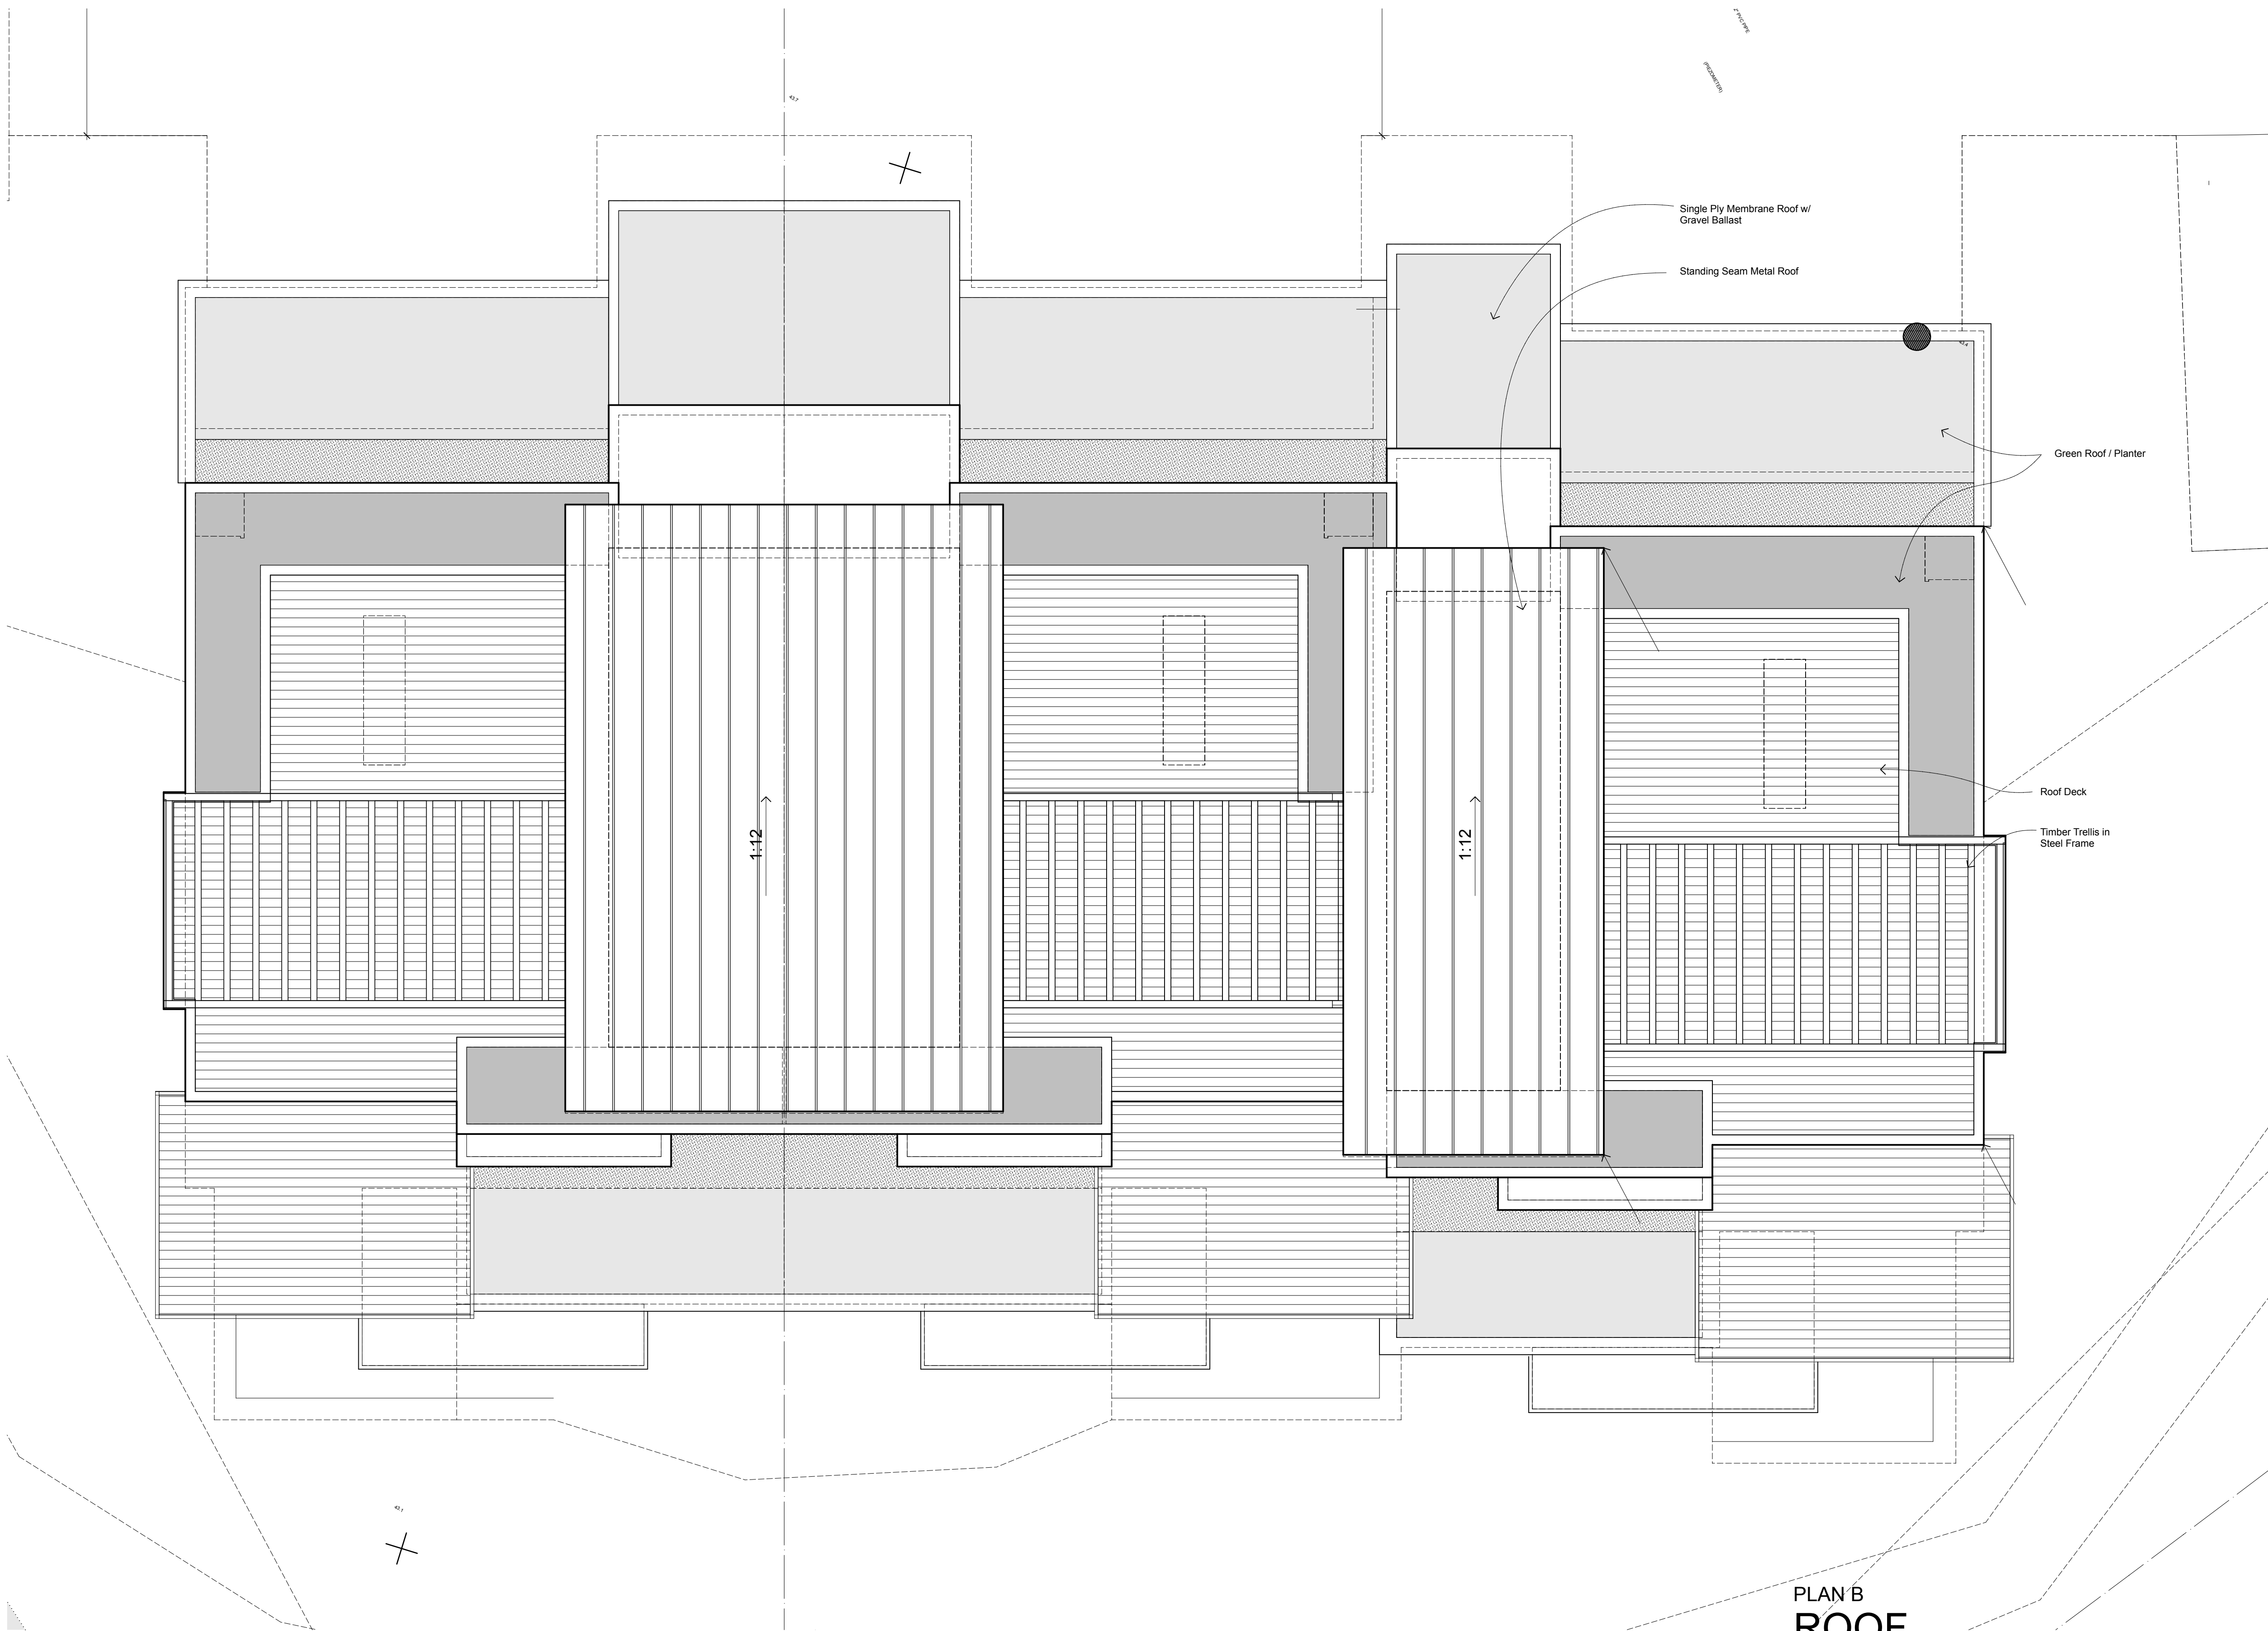

PLAN B
ROOF
SCALE: 1/4" = 1'-0"

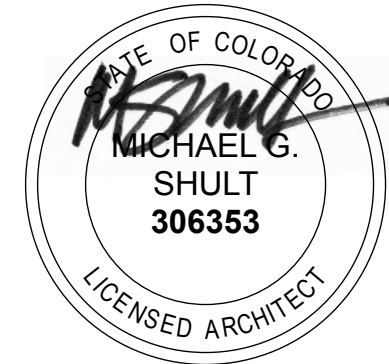

MAY 12, 2025

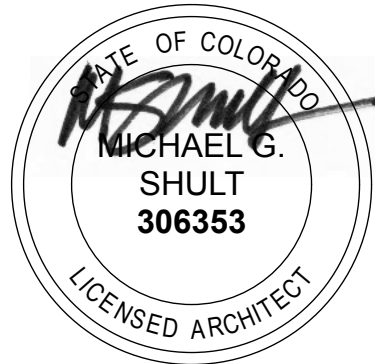



MAY 12, 2025



PLAN B
FRONT ELEVATION
SCALE: 1/4" = 1'-0"


PROPOSED MULTI-FAMILY PROJECT FOR:
THE LANDING
LOT 6.7 RAINBOW TWO
FRISCO, COLORADO

A3.1B

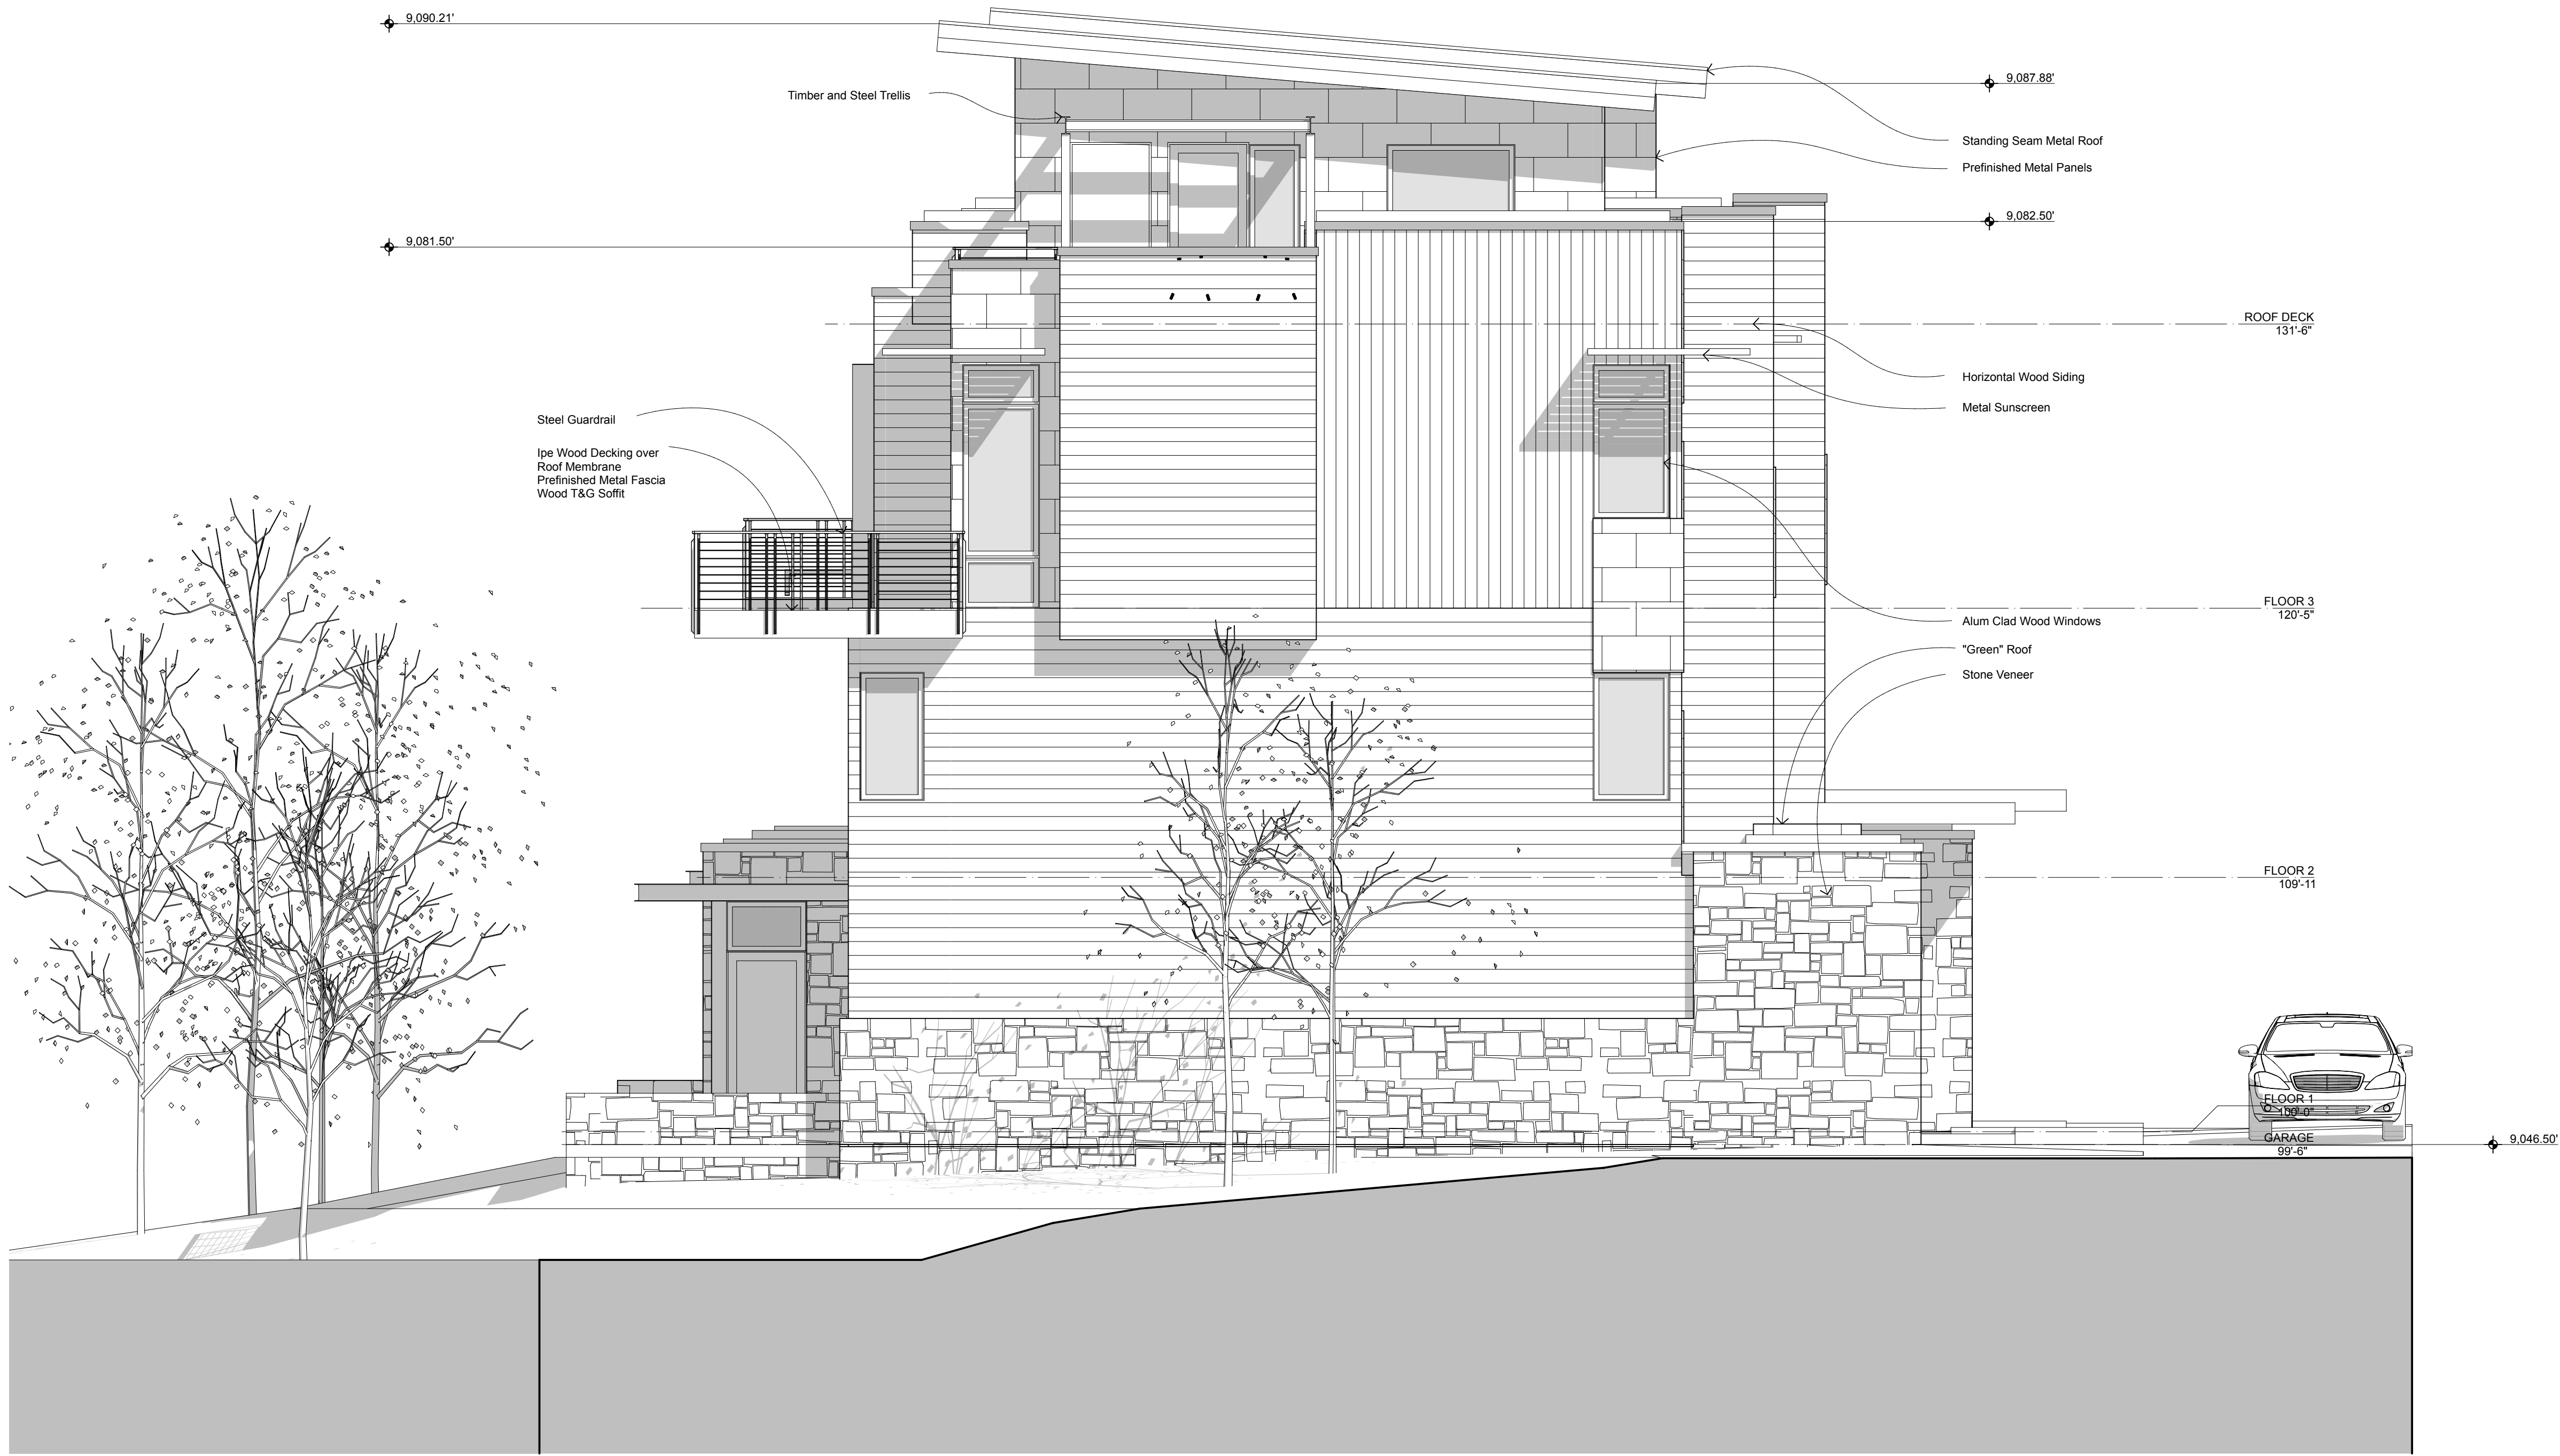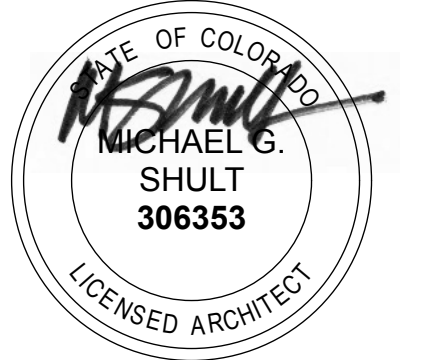

PLAN B
SIDE ELEVATION
SCALE: 1/4" = 1'-0"

PROPOSED MULTI-FAMILY PROJECT FOR:
THE LANDING
LOT 6.7 RAINTREE TWO
FRISCO, COLORADO

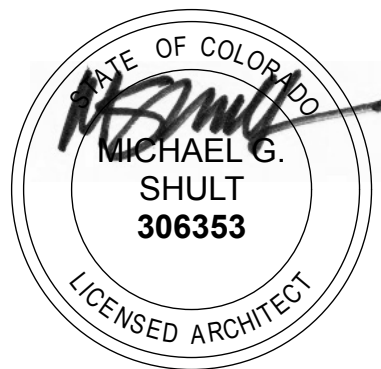

MAY 12, 2025



PLAN B
REAR ELEVATION
SCALE: 1/4" = 1'-0"

PROPOSED MULTI-FAMILY PROJECT FOR:
THE LANDING
LOT 6.7 RAINBOW TWO
FRISCO, COLORADO

Metal Roofing

Fascia

Metal Siding

Bridger Steel Vintage



Western



Wood Siding

Garage Doors

Montana Timber

Ranchwood

Wire Brushed Fir

Western

Yellowstone

Glacier Gray

Glacier Gray



Yellowstone



Soffit

Timbers

Montana Timber

Ranchwood Yellowstone




Windows

Guardrails

Structural Steel

Steel Railings

Black Painted/Powdercoat

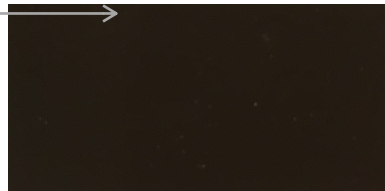

Stone Veneer

Telluride Stoner

Highlands Blend



THE LANDING

Frisco Colorado

Exterior Color Schedule

Michael Shult Architect

MAY 10, 2025

Metal Roofing

Fascia

Metal Siding

Bridger Steel Vintage



Western



Wood Siding

Garage Doors

Montana Timber

Ranchwood

Wire Brushed Fir

Western

Yellowstone

Glacier Gray

Glacier Gray



Yellowstone



Soffit

Timbers

Montana Timber

Ranchwood Yellowstone



Windows

Guardrails

Structural Steel

Steel Railings

Black Painted/Powdercoat



Stone Veneer

Telluride Stoner

Highlands Blend



THE LANDING

Frisco Colorado

Exterior Color Schedule

Michael Shult Architect

MAY 10, 2025

May 21, 2025

Town of Frisco

Att: Kris Valdez

Re: The Landing at Frisco Condominiums

This letter confirms Michael Shult is authorized to represent Drake Landing, L. L. C. for the purpose of a major site plan approval.

A handwritten signature in blue ink, appearing to read "Thomas Silengo", with a stylized flourish extending from the end.

Thomas Silengo

Drake Landing, L. L. C.

Manager/Member